



LIGHTKIT



LINEAR



LINEAR COVE LARGE

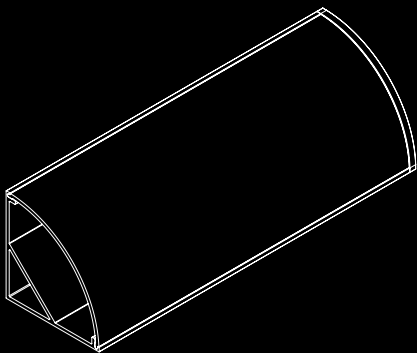


DIMENSIONS

DIAMETER	WIDTH	HEIGHT	LENGTH	CUTOUT
N/A	30mm	30mm	100-2500mm	N/A

TECHNICAL DATA

Lamp type:	SMD	Supply Voltage:	24V DC
Lamp wattage:	9.6 - 28.8W	Glow wire resistance:	960°
Lamp life:	50,000hrs L70	LED maintenance:	LM80 (L70)
Binning:	3-Step MacAdams	Mounting surface classification:	
CRI:	90Ra	Connector block:	500mm Wire Tails
Control gear:	Remote	Protection classification:	
Materials:	Extruded aluminium with PC diffuser	Standards:	EN/AS/NZS 60598-2-2, 62031, 62471
Lumen Package:	See specification table	Warranty:	5 years (T&Cs apply)

POWERED BY
I B L

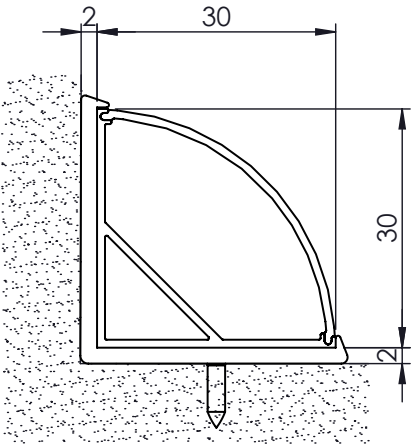



SPECIFICATION

RANGE	STYLE	SIZE	MOUNTING	TYPE	DIFFUSER		FINISH	CCT	LED POWER	LENGTH	DRIVER
Linear	Cove	Large	Surface (SF)	Fixed	Round (1) Square (4) No Diffuser (X)		White (1) Black (2) Aluminium (5)	2400K (C24) 2700K (C27) 3000K (C30) 4000K (C40) 6000K (C60)	9.6W/m 240 LEDs/m (2810) 645lm/m 14.4W/m 240 LEDs/m (2814) 967lm/m 19.2W/m 2x120 LEDs/m (2819) 1289lm/m 9.6W/m 238 LEDs/m (8710) 883lm/m 14.4W/m 238 LEDs/m (8714) 1329lm/m 19.2W/m 238 LEDs/m (8719) 1707lm/m 25W/m 238 LEDs/m (8725) 2183lm/m	(-XXXX) XXXX denotes length in mm	Non-Dim (-D1) Phase (-D2) 0-10V (-D3) DALI (-D4)
								Warm Dim Voltage Reducing 2700-1800K (C2718W)	9.6W/m 192 LEDs/m (6610) 529lm/m 14.4W/m 192 LEDs/m (6914) 699lm/m 20W/m 240 LEDs/m (6914) 1101lm/m 24W/m 240 LEDs/m (6914) 1166lm/m		

ORDER CODE: (Bold above denotes code)

L	C	L	SF	F	—	.	—	—	—	—	—
---	---	---	----	---	---	---	---	---	---	---	---

LINEAR COVE SMALL

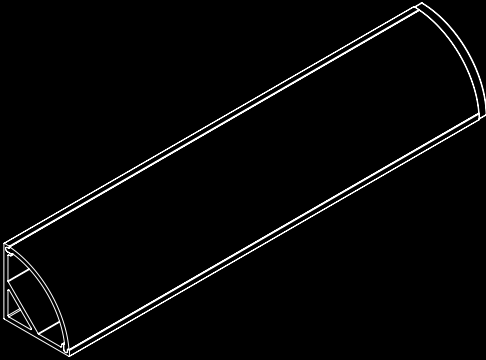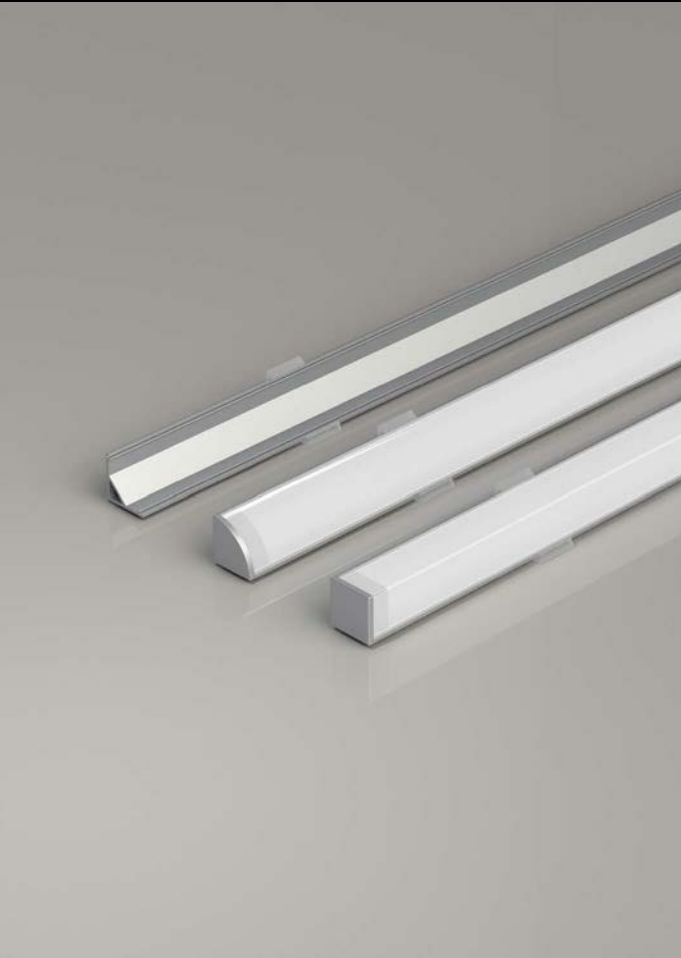


DIMENSIONS

DIAMETER	WIDTH	HEIGHT	LENGTH	CUTOUT
N/A	16mm	16mm	100-2500mm	N/A

TECHNICAL DATA

Lamp type:	SMD	Supply Voltage:	24V DC
Lamp wattage:	4.8 - 19.2W	Glow wire resistance:	960°
Lamp life:	50,000hrs L70	LED maintenance:	LM80 (L70)
Binning:	3-Step MacAdams	Mounting surface classification:	
CRI:	90Ra	Connector block:	500mm Wire Tails
Control gear:	Remote	Protection classification:	
Materials:	Extruded aluminium with PC diffuser	Standards:	EN/IAS/NZS 60598-2-2, 62031, 62471
Lumen Package:	See specification table	Warranty:	5 years (T&Cs apply)

POWERED BY
IBL

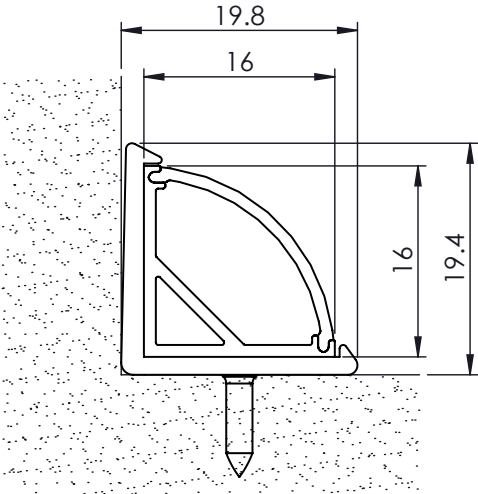



SPECIFICATION

RANGE	STYLE	SIZE	MOUNTING	TYPE	DIFFUSER		FINISH	CCT	LED POWER	LENGTH	DRIVER
Linear	Cove	Small	Surface (SF)	Fixed	Round (1) Square (4) No Diffuser (X)		White (1) Black (2) Aluminium (5)	2400K (C24) 2700K (C27) 3000K (C30) 4000K (C40) 6000K (C60)	4.8W/m 240 LEDs/m (2805) 314lm/m 7.68W/m 240 LEDs/m (2808) 544lm/m 9.6W/m 240 LEDs/m (2810) 680lm/m 14.4W/m 240 LEDs/m (2814) 1020lm/m 19.2W/m 240 LEDs/m (2819) 1360lm/m	(-XXXX) XXXX denotes length in mm	Non-Dim (-D1) Phase (-D2) 0-10V (-D3) DALI (-D4)
								Warm Dim Voltage Reducing 2700-1800K (C2718WR)	4.8W/m 312 LEDs/m (6905) 285lm/m 9.6W/m 312 LEDs/m (6910) 567lm/m 14.4W/m 312 LEDs/m (6914) 821lm/m		

ORDER CODE: (Bold above denotes code)

L	C	S	SF	F	—	.	—	—	—	—	—
---	---	---	----	---	---	---	---	---	---	---	---

LINEAR BOX LARGE

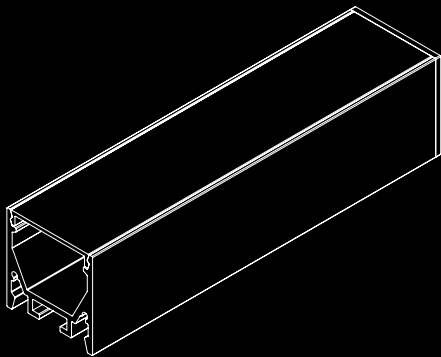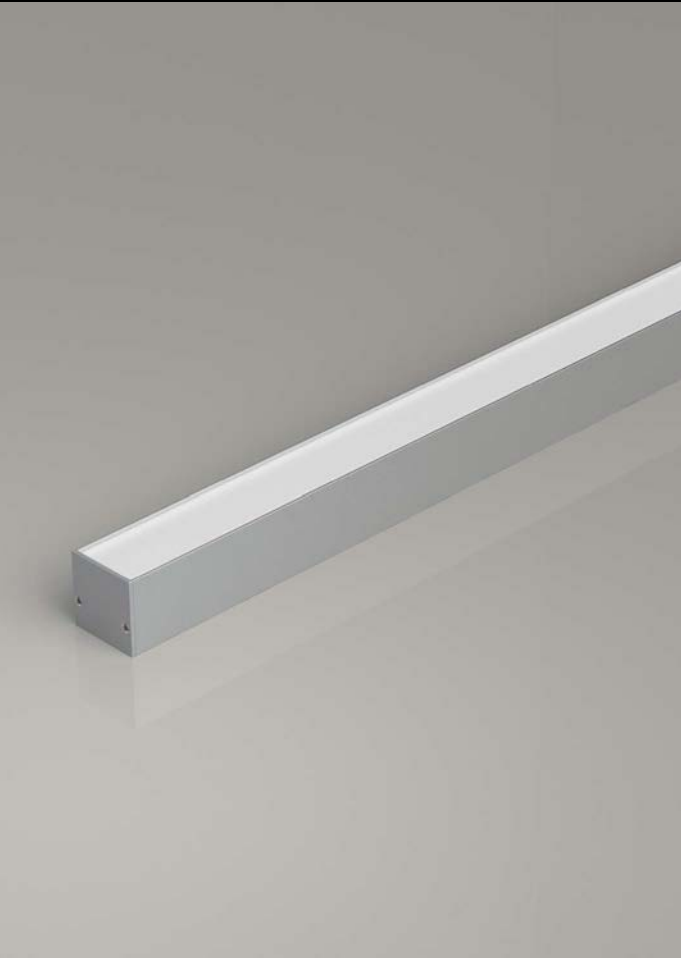


DIMENSIONS

DIAMETER	WIDTH	HEIGHT	LENGTH	CUTOUT
N/A	25mm	25mm	100-2500mm	N/A

TECHNICAL DATA

Lamp type:	SMD	Supply Voltage:	24V DC
Lamp wattage:	9.6 - 25W	Glow wire resistance:	960°
Lamp life:	50,000hrs L70	LED maintenance:	LM80 (L70)
Binning:	3-Step MacAdams	Mounting surface classification:	
CRI:	90Ra	Connector block:	500mm Wire Tails
Control gear:	Remote	Protection classification:	
Materials:	Extruded aluminium with PC diffuser	Standards:	EN/AS/NZS 60598-2-2, 62031, 62471
Lumen Package:	See specification table	Warranty:	5 years (T&Cs apply)

POWERED BY
I B L

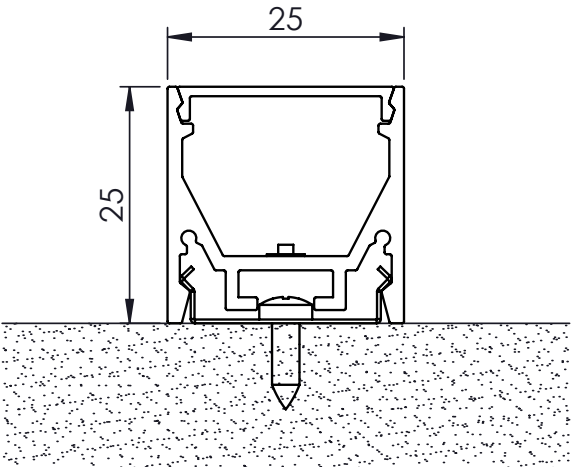


SPECIFICATION

RANGE	STYLE	SIZE	MOUNTING	TYPE	DIFFUSER		FINISH	CCT	LED POWER	LENGTH	DRIVER
Linear	Box	Large	Surface (SF)	Fixed	Flat (6)		White (1) Black (2) Aluminium (5)	2400K (C24) 2700K (C27) 3000K (C30) 4000K (C40) 6000K (C60)	9.6W/m 240 LEDs/m (2810) 548lm/m 14.4W/m 240 LEDs/m (2814) 821lm/m 19.2W/m 240 LEDs/m (2819) 1095lm/m 9.6W/m 238 LEDs/m (8710) 750lm/m 14.4W/m 238 LEDs/m (8714) 1128lm/m 19.2W/m 238 LEDs/m (8719) 1450lm/m 25W/m 238 LEDs/m (8725) 1854lm/m	(-XXXX) XXXX denotes length in mm	Non-Dim (-D1) Phase (-D2) 0-10V (-D3) DALI (-D4)
								Warm Dim Voltage Reducing 2700-1800K (C2718WR)	9.6W/m 192 LEDs/m (6610) 449lm/m 14.4W/m 192 LEDs/m (6914) 594lm/m 20W/m 240 LEDs/m (3820) 935lm/m 24W/m 240 LEDs/m (3824) 990lm/m		

ORDER CODE: (Bold above denotes code)

L	B	L	SF	F	6	.	—	—	—	—	—
---	---	---	----	---	---	---	---	---	---	---	---

LINEAR BOX SMALL

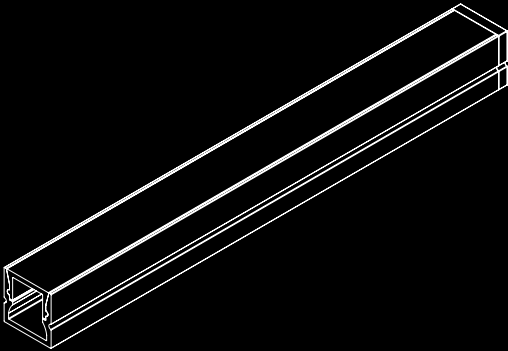


DIMENSIONS

DIAMETER	WIDTH	HEIGHT	LENGTH	CUTOUT
N/A	10.5mm	10.5mm	100-2500mm	N/A

TECHNICAL DATA

Lamp type:	SMD	Supply Voltage:	24V DC
Lamp wattage:	4.8 - 14.4W	Glow wire resistance:	960°
Lamp life:	50,000hrs L70	LED maintenance:	LM80 (L70)
Binning:	3-Step MacAdams	Mounting surface classification:	
CRI:	90Ra	Connector block:	500mm Wire Tails
Control gear:	Remote	Protection classification:	
Materials:	Extruded aluminium with PC diffuser	Standards:	EN/AS/NZS 60598-2-2, 62031, 62471
Lumen Package:	See specification table	Warranty:	5 years (T&Cs apply)

POWERED BY
IBL

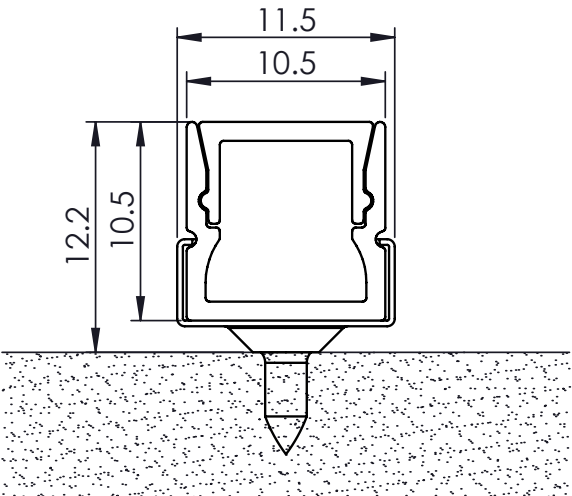


SPECIFICATION

RANGE	STYLE	SIZE	MOUNTING	TYPE	DIFFUSER		FINISH	CCT	LED POWER	LENGTH	DRIVER
Linear	Box	Small	Surface (SF)	Fixed	Flat (6)		White (1) Black (2) Aluminium (5)	2400K (C24) 2700K (C27) 3000K (C30) 4000K (C40) 6000K (C60)	4.8W/m 300 LEDs/m (6905) 263m/m 7.67W/m 300 LEDs/m (6908) 444lm/m 9.6W/m 300 LEDs/m (6910) 534lm/m 14.4W/m 300 LEDs/m (6914) 818lm/m	(-XXXX) XXXX denotes length in mm	Non-Dim (-D1) Phase (-D2) 0-10V (-D3) DALI (-D4)
								Warm Dim Voltage Reducing 2700-1800K (C2718WR)	4.8W/m 312 LEDs/m (6905) 204m/m 9.6W/m 312 LEDs/m (6910) 405m/m 14.4W/m 312 LEDs/m (6914) 586m/m		

ORDER CODE: (Bold above denotes code)

L	B	S	SF	F	6	.	—	—	—	—	—
---	---	---	----	---	---	---	---	---	---	---	---

LINEAR JOINERY SURFACE

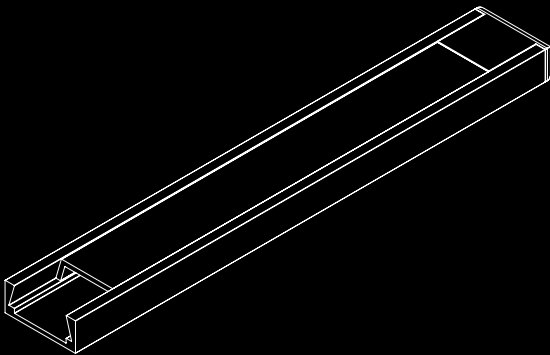


DIMENSIONS

DIAMETER	WIDTH	HEIGHT	LENGTH	CUTOUT
N/A	15mm	6mm	100-2500mm	N/A

TECHNICAL DATA

Lamp type:	SMD	Supply Voltage:	24V DC
Lamp wattage:	4.8 - 20W/m	Glow wire resistance:	960°
Lamp life:	50,000hrs L70	LED maintenance:	LM80 (L70)
Binning:	3-Step MacAdams	Mounting surface classification:	
CRI:	90Ra	Connector block:	500mm Wire Tails
Control gear:	Remote	Protection classification:	
Materials:	Extruded aluminium with PC diffuser	Standards:	EN/AS/NZS 60598-2-2, 62031, 62471
Lumen Package:	See specification table	Warranty:	5 years (T&Cs apply)

POWERED BY
IBL

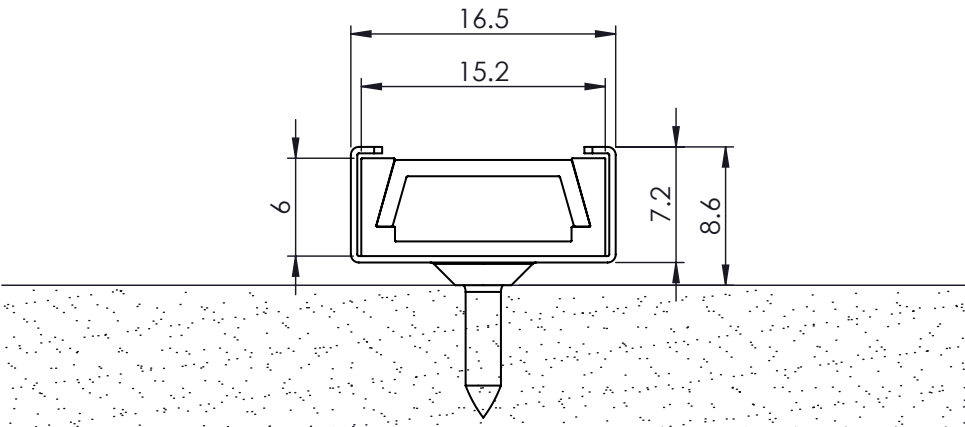


SPECIFICATION

RANGE	STYLE	SIZE	MOUNTING	TYPE	DIFFUSER		FINISH	CCT	LED POWER	LENGTH	DRIVER
Linear	Joinery	Small	Surface (SF)	Fixed	Flat (6)		White (1) Black (2) Aluminium (5)	2400K (C24) 2700K (C27) 3000K (C30) 4000K (C40) 6000K (C60)	4.8W/m 300 LEDs/m (6905) 335lm/m 7.67W/m 300 LEDs/m (6908) 568lm/m 9.6W/m 300 LEDs/m (6910) 679lm/m 14.4W/m 300 LEDs/m (6914) 1042lm/m 5W/m 700 LEDs/m (1705) 357lm/m 10W/m 700 LEDs/m (1710) 746lm/m 15W/m 700 LEDs/m (1715) 1113lm/m 20W/m 700 LEDs/m (1720) 1463lm/m	(-XXXX) XXXX denotes length in mm	Non-Dim (-D1) Phase (-D2) 0-10V (-D3) DALI (-D4)
								Warm Dim Voltage Reducing 2700-1800K (C2718WR)	4.8W/m 312 LEDs/m (6905) 259lm/m 9.6W/m 312 LEDs/m (6910) 515lm/m 14.4W/m 312 LEDs/m (6914) 746lm/m		

ORDER CODE: (Bold above denotes code)

L	J	S	SF	F	6	.	—	—	—	—	—
---	---	---	----	---	---	---	---	---	---	---	---

LINEAR JOINERY RECESSED

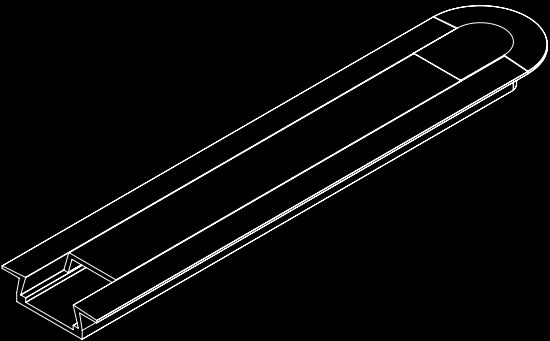


DIMENSIONS

DIAMETER	WIDTH	HEIGHT	LENGTH	CUTOUT
N/A	22mm	6mm	100-2500mm	18 x 9mm

TECHNICAL DATA

Lamp type:	SMD	Supply Voltage:	24V DC
Lamp wattage:	4.8 - 20W/m	Glow wire resistance:	960°
Lamp life:	50,000hrs L70	LED maintenance:	LM80 (L70)
Binning:	3-Step MacAdams	Mounting surface classification:	
CRI:	90Ra	Connector block:	500mm Wire Tails
Control gear:	Remote	Protection classification:	
Materials:	Extruded aluminium with PC diffuser	Standards:	EN/AS/NZS 60598-2-2, 62031, 62471
Lumen Package:	See specification table	Warranty:	5 years (T&Cs apply)

POWERED BY
IBL

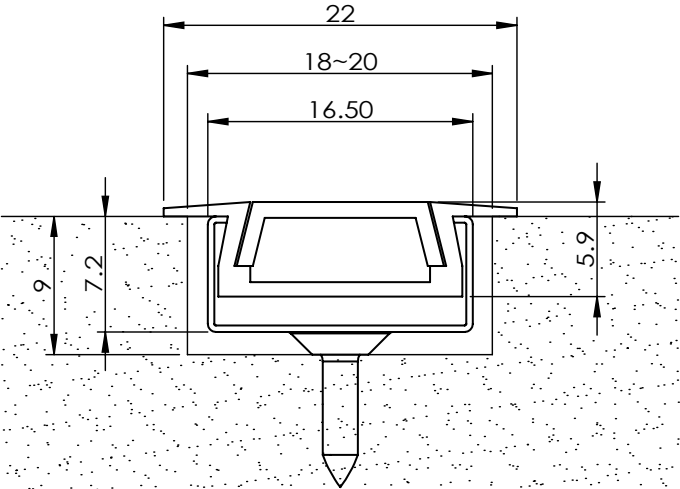


SPECIFICATION

RANGE	STYLE	SIZE	MOUNTING	TYPE	DIFFUSER		FINISH	CCT	LED POWER	LENGTH	DRIVER
Linear	Joinery	Small	Recessed	Fixed	Flat (6)		White (1) Black (2) Aluminium (5)	2400K (C24) 2700K (C27) 3000K (C30) 4000K (C40) 6000K (C60)	4.8W/m 300 LEDs/m (6905) 335lm/m 7.67W/m 300 LEDs/m (6908) 568lm/m 9.6W/m 300 LEDs/m (6910) 679lm/m 14.4W/m 300 LEDs/m (6914) 1042lm/m 5W/m 700 LEDs/m (1705) 357lm/m 10W/m 700 LEDs/m (1710) 746lm/m 15W/m 700 LEDs/m (1715) 1113lm/m 20W/m 700 LEDs/m (1720) 1463lm/m	(-XXXX) XXXX denotes length in mm	Non-Dim (-D1) Phase (-D2) 0-10V (-D3) DALI (-D4)
								Warm Dim Voltage Reducing 2700-1800K (C2718WR)	4.8W/m 312 LEDs/m (6905) 259m/m 9.6W/m 312 LEDs/m (6910) 515m/m 14.4W/m 312 LEDs/m (6914) 746lm/m		

ORDER CODE: (Bold above denotes code)

L	J	S	R	F	6	.	—	—	—	—	—
---	---	---	---	---	---	---	---	---	---	---	---

RAIL RECESSED LARGE

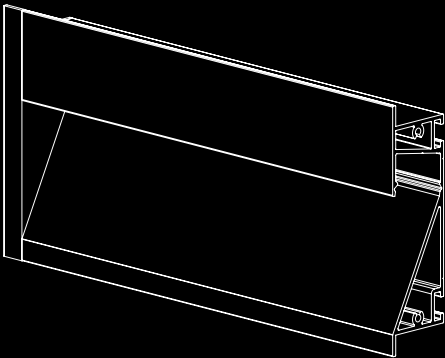


DIMENSIONS

DIAMETER	WIDTH	HEIGHT	LENGTH	CUTOUT
N/A	90mm	46mm	100-2500mm	80mm x (L+2)

TECHNICAL DATA

Lamp type:	SMD	Supply Voltage:	24V DC
Lamp wattage:	9.6 - 25W/m	Glow wire resistance:	960°
Lamp life:	50,000hrs L70	LED maintenance:	LM80 (L70)
Binning:	3-Step MacAdams	Mounting surface classification:	
CRI:	90Ra	Connector block:	500mm Wire Tails
Control gear:	Remote CV	Protection classification:	
Materials:	Extruded aluminium with PC diffuser	Standards:	EN/AS/NZS 60598-2-2, 62031, 62471
Lumen Package:	See specification table	Warranty:	5 years (T&Cs apply)

POWERED BY
IBL

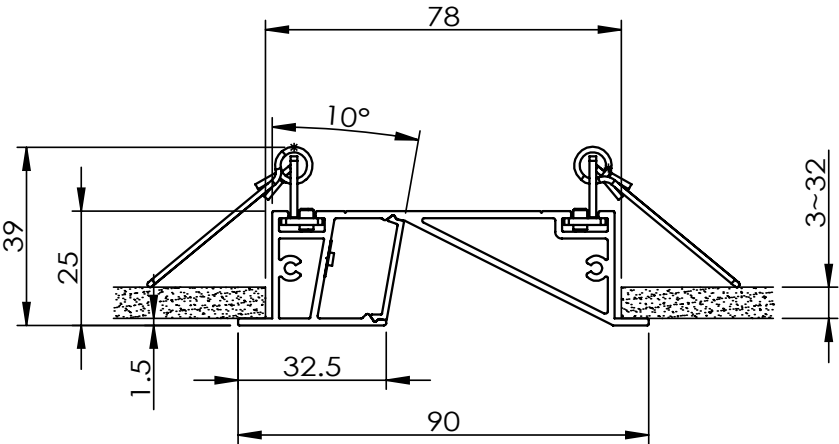



SPECIFICATION

RANGE	STYLE	SIZE	MOUNTING	TYPE	DIFFUSER		FINISH	CCT	LED POWER	LENGTH	DRIVER
Linear	Rail	Large	Recessed	Fixed	Flat (6)		White (1) Black (2) Aluminium (5)	2400K (C24) 2700K (C27) 3000K (C30) 4000K (C40) 6000K (C60)	9.6W/m 300 LEDs/m (2810) 521lm/m 14.4W/m 300 LEDs/m (2814) 774lm/m 9.6W/m 238 LEDs/m (8710) 629lm/m 14.4W/m 238 LEDs/m (8714) 947lm/m 19.2W/m 238 LEDs/m (8719) 1215lm/m 25W/m 238 LEDs/m (8725) 1555lm/m	(-XXXX) XXXX denotes length in mm	Non-Dim (-D1) Phase (-D2) 0-10V (-D3) DALI (-D4)
								Warm Dim Voltage Reducing 2700-1800K (C2718WR)	9.6W/m 312 LEDs/m (6910) 383lm/m 14.4W/m 312 LEDs/m (6914) 554lm/m 20W/m 240 LEDs/m (3820) 784lm/m 24W/m 240 LEDs/m (3824) 830lm/m		

ORDER CODE: (Bold above denotes code)

L	R	L	R	F	6	.	—	—	—	—	—
---	---	---	---	---	---	---	---	---	---	---	---

RAIL RECESSED SMALL

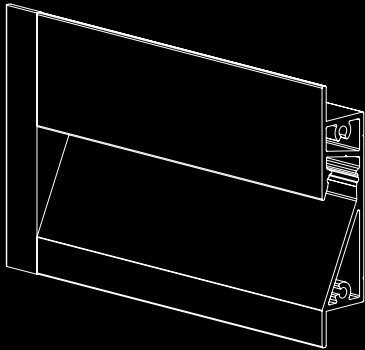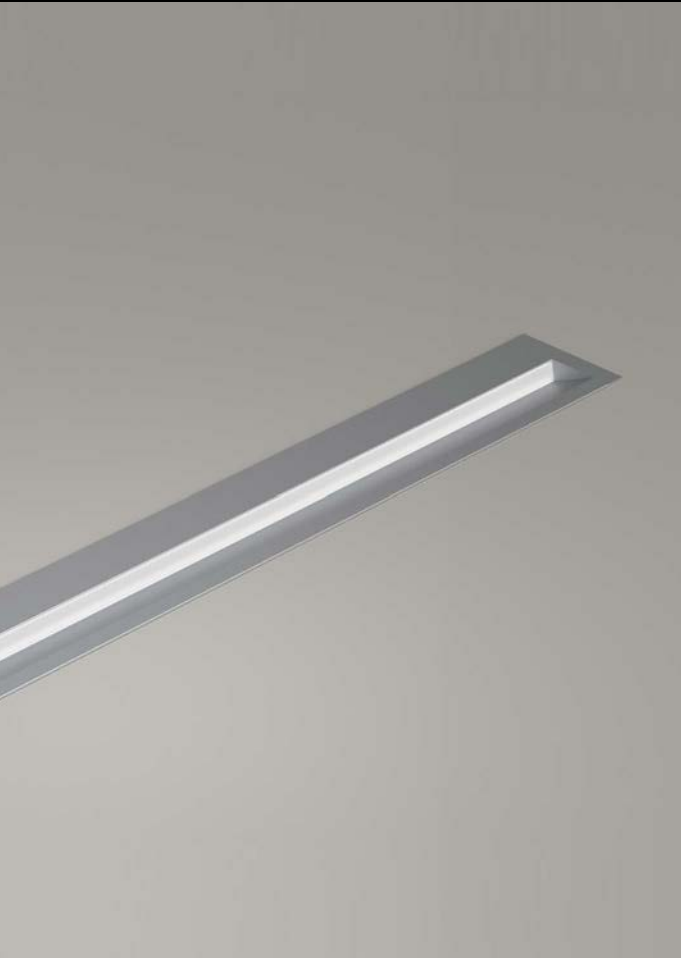


DIMENSIONS

DIAMETER	WIDTH	HEIGHT	LENGTH	CUTOUT
N/A	55mm	32mm	100-2500mm	45mm x (L+2)

TECHNICAL DATA

Lamp type:	SMD	Supply Voltage:	24V DC
Lamp wattage:	4.8 - 14.4W/m	Glow wire resistance:	960°
Lamp life:	50,000hrs L70	LED maintenance:	LM80 (L70)
Binning:	3-Step MacAdams	Mounting surface classification:	
CRI:	90Ra	Connector block:	500mm Wire Tails
Control gear:	Remote CV	Protection classification:	
Materials:	Extruded aluminium with PC diffuser	Standards:	EN/AS/NZS 60598-2-2, 62031, 62471
Lumen Package:	See specification table	Warranty:	5 years (T&Cs apply)

POWERED BY
IBL

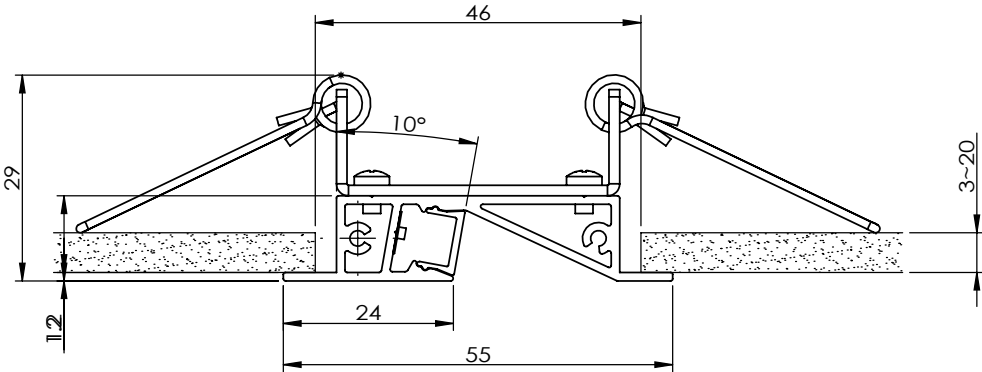


SPECIFICATION

RANGE	STYLE	SIZE	MOUNTING	TYPE	DIFFUSER	FINISH	CCT	LED POWER	LENGTH	DRIVER
Linear	Rail	Small	Recessed	Fixed	Flat (6)	White (1) Black (2) Aluminium (5)	2400K (C24) 2700K (C27) 3000K (C30) 4000K (C40) 6000K (C60)	4.8W/m 300 LEDs/m (6905) 229lm/m 7.67W/m 300 LEDs/m (6908) 388lm/m 9.6W/m 300 LEDs/m (6910) 466lm/m 14.4W/m 300 LEDs/m (6914) 714lm/m	(-XXXX) XXXX denotes length in mm	Non-Dim (-D1) Phase (-D2) 0-10V (-D3) DALI (-D4)
							Warm Dim Voltage Reducing 2700-1800K (C2718WR)	4.8W/m 312 LEDs/m (6905) 178lm/m 9.6W/m 312 LEDs/m (6910) 353lm/m 14.4W/m 312 LEDs/m (6914) 512lm/m		

ORDER CODE: (Bold above denotes code)

L	R	S	R	F	6	.	—	—	—	—	—
---	---	---	---	---	---	---	---	---	---	---	---

RAIL SURFACE LARGE

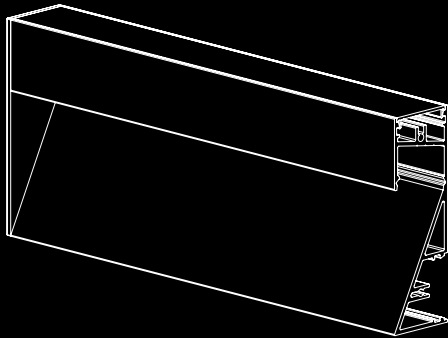


DIMENSIONS

DIAMETER	WIDTH	HEIGHT	LENGTH	CUTOUT
N/A	75mm	25mm	100-2500mm	N/A

TECHNICAL DATA

Lamp type:	SMD	Supply Voltage:	24V DC
Lamp wattage:	9.6 - 25W/m	Glow wire resistance:	960°
Lamp life:	50,000hrs L70	LED maintenance:	LM80 (L70)
Binning:	3-Step MacAdams	Mounting surface classification:	
CRI:	90Ra	Connector block:	500mm Wire Tails
Control gear:	Remote CV	Protection classification:	
Materials:	Extruded aluminium with PC diffuser	Standards:	EN/AS/NZS 60598-2-2, 62031, 62471
Lumen Package:	See specification table	Warranty:	5 years (T&Cs apply)

POWERED BY
IBL

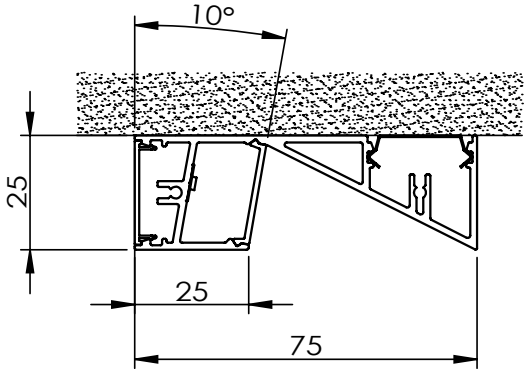


SPECIFICATION

RANGE	STYLE	SIZE	MOUNTING	TYPE	DIFFUSER		FINISH	CCT	LED POWER	LENGTH	DRIVER
Linear	Rail	Large	Recessed	Fixed	Flat (6)		White (1) Black (2) Aluminium (5)	2400K (C24) 2700K (C27) 3000K (C30) 4000K (C40) 6000K (C60)	9.6W/m 300 LEDs/m (2810) 504lm/m 14.4W/m 300 LEDs/m (2814) 774lm/m 9.6W/m 238 LEDs/m (8710) 629lm/m 14.4W/m 238 LEDs/m (8714) 946lm/m 19.2W/m 238 LEDs/m (8719) 1216lm/m 25W/m 238 LEDs/m (8725) 1555lm/m	(-XXXX) XXXX denotes length in mm	Non-Dim (-D1) Phase (-D2) 0-10V (-D3) DALI (-D4)
								Warm Dim Voltage Reducing 2700-1800K (C2718WR)	9.6W/m 312/ LEDs m (6910) 376lm/m 14.4W/m 312 LEDs/m (6914) 498lm/m 20W/m 240 LEDs/m (3820) 784lm/m 24W/m 240 LEDs/m (3824) 830lm/m		

ORDER CODE: (Bold above denotes code)

L	R	L	R	F	6	.	—	—	—	—	—
---	---	---	---	---	---	---	---	---	---	---	---

RAIL SURFACE SMALL

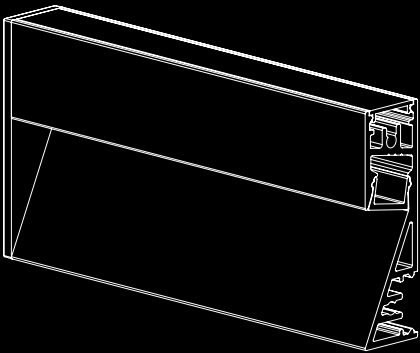


DIMENSIONS

DIAMETER	WIDTH	HEIGHT	LENGTH	CUTOUT
N/A	40mm	12mm	100-2500mm	N/A

TECHNICAL DATA

Lamp type:	SMD	Supply Voltage:	24V DC
Lamp wattage:	4.8 - 14.4W/m	Glow wire resistance:	960°
Lamp life:	50,000hrs L70	LED maintenance:	LM80 (L70)
Binning:	3-Step MacAdams	Mounting surface classification:	
CRI:	90Ra	Connector block:	500mm Wire Tails
Control gear:	Remote CV	Protection classification:	
Materials:	Extruded aluminium with PC diffuser	Standards:	EN/AS/NZS 60598-2-2, 62031, 62471
Lumen Package:	See specification table	Warranty:	5 years (T&Cs apply)

POWERED BY
IBL

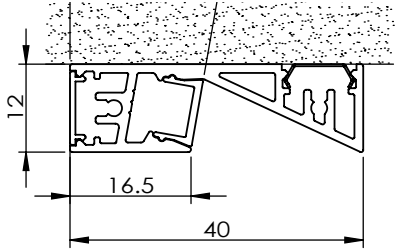


SPECIFICATION

RANGE	STYLE	SIZE	MOUNTING	TYPE	DIFFUSER		FINISH	CCT	LED POWER	LENGTH	DRIVER
Linear	Rail	Small	Recessed	Fixed	Flat (6)		White (1) Black (2) Aluminium (5)	2400K (C24) 2700K (C27) 3000K (C30) 4000K (C40) 6000K (C60)	4.8W/m 300 LEDs/m (6905) 229lm/m 7.67W/m 300 LEDs/m (6908) 388lm/m 9.6W/m 300 LEDs/m (6910) 466lm/m 14.4W/m 300 LEDs/m (6914) 714lm/m	(-XXXX) XXXX denotes length in mm	Non-Dim (-D1) Phase (-D2) 0-10V (-D3) DALI (-D4)
								Warm Dim Voltage Reducing 2700-1800K (C2718WR)	4.8W/m 312 LEDs/m (6905) 178lm/m 9.6W/m 312 LEDs/m (6910) 353lm/m 14.4W/m 312 LEDs/m (6914) 512lm/m		

ORDER CODE: (Bold above denotes code)

L	R	S	R	F	6	.	—	—	—	—	—
---	---	---	---	---	---	---	---	---	---	---	---

LEDGE LARGE

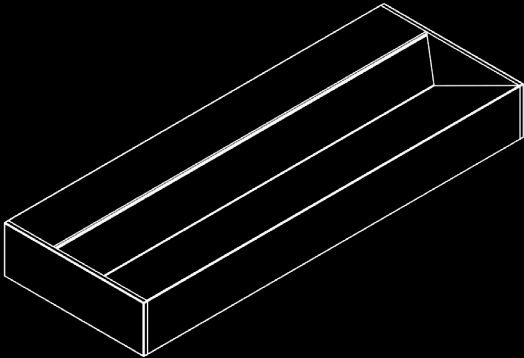


DIMENSIONS

DIAMETER	WIDTH	HEIGHT	LENGTH	CUTOUT
N/A	75mm	25mm	See specification table	N/A

TECHNICAL DATA

Lamp type:	SMD	Supply Voltage:	24V DC
Lamp wattage:	9.6 - 25W/m	Glow wire resistance:	960°
Lamp life:	50,000hrs L70	LED maintenance:	LM80 (L70)
Binning:	3-Step MacAdams	Mounting surface classification:	
CRI:	90Ra	Connector block:	500mm Wire Tails
Control gear:	Remote CV	Protection classification:	
Materials:	Extruded aluminium with PC diffuser	Standards:	EN/AS/NZS 60598-2-2, 62031, 62471
Lumen Package:	See specification table	Warranty:	5 years (T&Cs apply)

POWERED BY
I B L

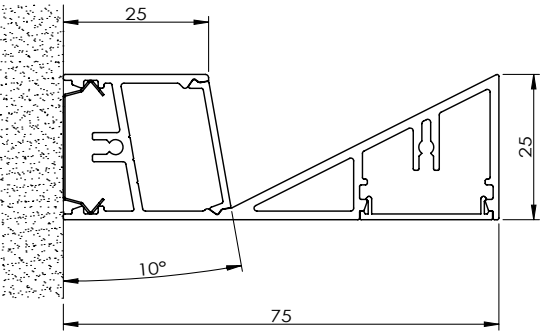



SPECIFICATION

RANGE	STYLE	SIZE	MOUNTING	TYPE	DIFFUSER		FINISH	CCT	LED POWER	LENGTH	DRIVER
Linear	Ledge	Large	Surface (SF)	Fixed	Flat (6)		White (1) Black (2) Aluminium (5)	2400K (C24) 2700K (C27) 3000K (C30) 4000K (C40) 6000K (C60)	9.6W/m 300 LEDs/m (6910) 504lm/m 14.4W/m 300 LEDs/m (6914) 774lm/m 9.6W/m 238 LEDs/m (8710) 629lm/m 14.4W/m 238 LEDs/m (8714) 946lm/m 19.2W/m 238 LEDs/m (8719) 1216lm/m 25W/m 238 LEDs/m (8725) 1555lm/m	200mm (-0200) 500mm (-0500) 1000mm (-1000) 2000mm (-2000) (-XXXX) XXXX denotes length in mm	Non-Dim (-D1) Phase (-D2) 0-10V (-D3) DALI (-D4)
								Warm Dim Voltage Reducing 2700-1800K (C2718WR)	9.6W/m 312 LEDs/m (6910) 376lm/m 14.4W/m 312 LEDs/m (6914) 498lm/m 20W/m 240 LEDs/m (3820) 784lm/m 24W/m 240 LEDs/m (3824) 830lm/m		

ORDER CODE: (Bold above denotes code)

L	L	L	SF	F	6	.	—	—	—	—	—
---	---	---	----	---	---	---	---	---	---	---	---

LEDGE SMALL

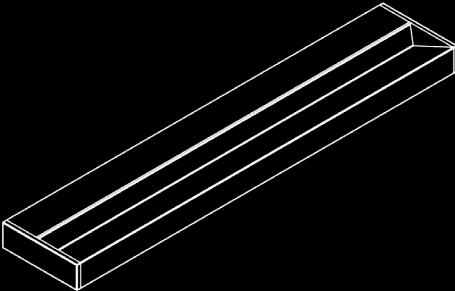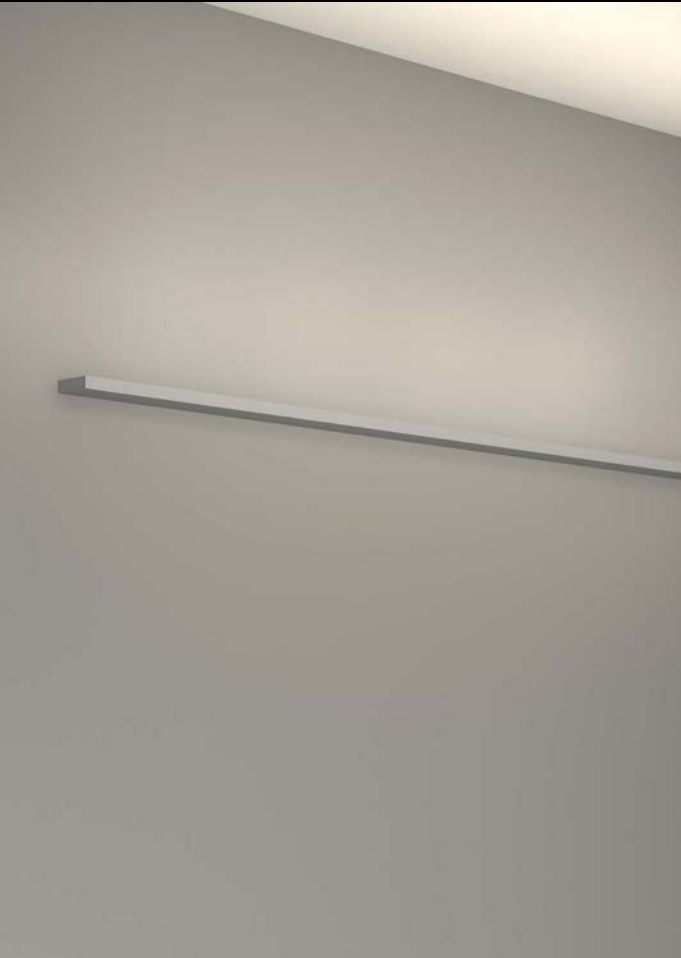


DIMENSIONS

DIAMETER	WIDTH	HEIGHT	LENGTH	CUTOUT
N/A	40mm	12mm	See specification table	N/A

TECHNICAL DATA

Lamp type:	SMD	Supply Voltage:	24V DC
Lamp wattage:	4.8 - 14.4W/m	Glow wire resistance:	960°
Lamp life:	50,000hrs L70	LED maintenance:	LM80 (L70)
Binning:	3-Step MacAdams	Mounting surface classification:	
CRI:	90Ra	Connector block:	500mm Wire Tails
Control gear:	Remote CV	Protection classification:	
Materials:	Extruded aluminium with PC diffuser	Standards:	EN/AS/NZS 60598-2-2, 62031, 62471
Lumen Package:	See specification table	Warranty:	5 years (T&Cs apply)

POWERED BY
I B L

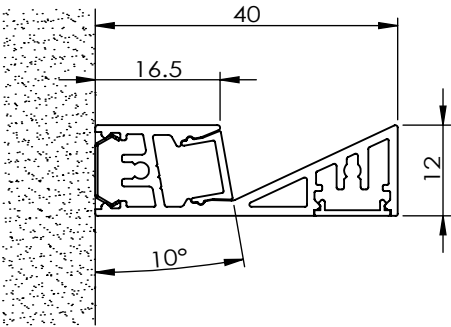

SPECIFICATION

RANGE	STYLE	SIZE	MOUNTING	TYPE	DIFFUSER		FINISH	CCT	LED POWER	LENGTH	DRIVER
Linear	Ledge	Small	Surface (SF)	Fixed	Flat (6)		White (1) Black (2) Aluminium (5)	2400K (C24) 2700K (C27) 3000K (C30) 4000K (C40) 6000K (C60)	4.8W/m 300 LEDs/m (6905) 229lm/m 7.67W/m LEDs/m (6908) 388lm/m 9.6W/m LEDs/m (6910) 466lm/m 14.4W/m LEDs/m (6914) 714lm/m	200mm (-0200) 500mm (-0500) 1000mm (-1000) 2000mm (-2000) (-XXXX) XXXX denotes length in mm	Non-Dim (-D1) Phase (-D2) 0-10V (-D3) DALI (-D4)
								Warm Dim Voltage Reducing 2700-1800K (C2718WR)	4.8W/m 312 LEDs/m (6905) 178lm/m 9.6W/m 312 LEDs/m (6910) 353lm/m 14.4W/m 312 LEDs/m (6914) 512lm/m		

ORDER CODE: (Bold above denotes code)

L	L	S	SF	F	6	.	—	—	—	—	—
---	---	---	----	---	---	---	---	---	---	---	---

lightkit@ibl.co.uk

www.lightkit.co

