



LIGHTKIT



NIGHT SERIES

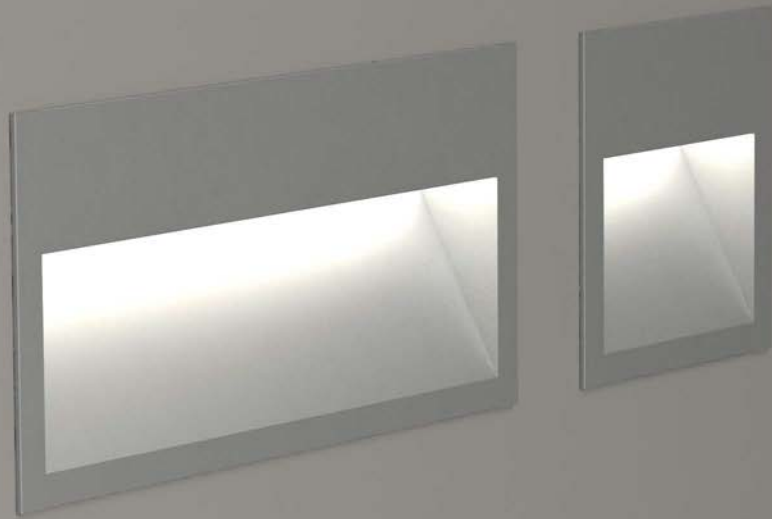



The NIGHT SERIES is a wall and ceiling mounted luminaire with recessed and surface options.

Specifically designed as a floor wash step/pathway light or night light, this is a very discrete option with soft light distribution.

The NIGHT fittings make use of the RAIL linear profile, and are available in both large and small sizes, with two lengths offering four power options from 0.4 to 2.3W

Warm-dim and tuneable white options available.

NIGHT RECESSED LARGE

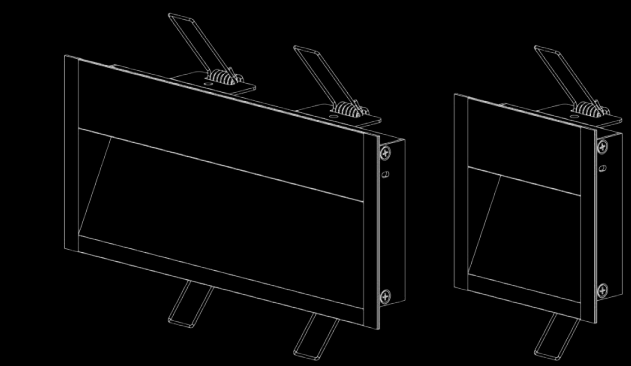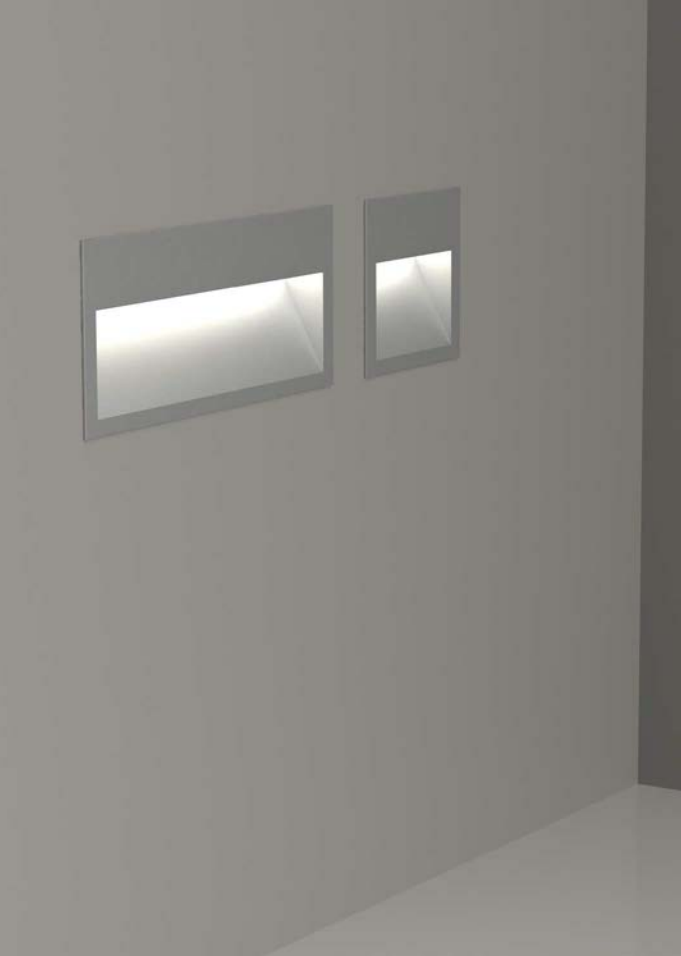

DIMENSIONS


DIAMETER	WIDTH	HEIGHT	LENGTH	CUTOUT
N/A	90mm	46mm	90 & 200mm options	See drawings

TECHNICAL DATA

Lamp Wattage and Delivered Lumens®:	0.8W : 44lm 1.2W : 62lm	1.6W : 105lm 2.3W : 144lm	
Lamp type:	SMD	Glow wire resistance:	960°
Lamp life:	50,000hrs L70	LED maintenance:	LM80 (L70)
Binning:	3-Step MacAdams	Connector block:	500mm Wire Tails
CRI:	90Ra	Mounting surface classification:	
Control gear:	Remote CV		
Thermal control rating:	IC-4/IC-F (abutted & covered)	Protection classification:	
Materials:	Extruded aluminium with PC diffuser	Standards:	EN/AS/NZS 60598-2-2, 62031, 62471
Supply Voltage:	24V DC	Warranty:	5 years (T&Cs apply)

(1) Delivered lumens are based on 3000K LED

POWERED BY
IBL

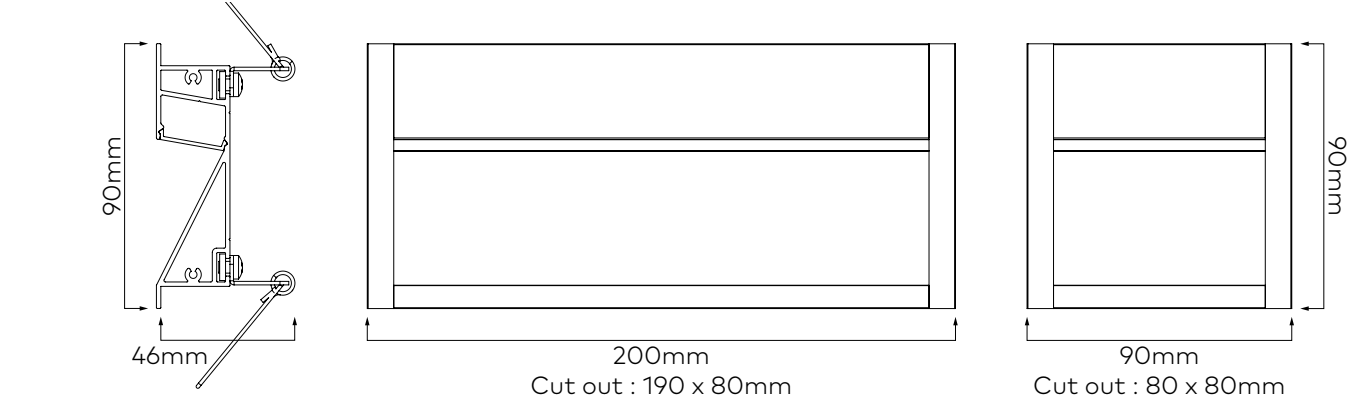



SPECIFICATION

RANGE	STYLE	SIZE	MOUNTING	TYPE	DIFFUSER	FINISH	CCT	LED POWER	DRIVER
Accent	Night	Large	Recessed	Fixed	Flat (6)	White (1) Black (2) Aluminium (5)	2400K (C24) 2700K (C27) 3000K (C30) 4000K (C40) 6000K (C60) Warm Dim Voltage Reducing 2700-1800K (C2718WR)	90mm / 0.8W (008-090) 90mm / 1.2W (012-090) 200mm / 1.6W (016-200) 200mm / 2.3W (023-200)	Non-Dim (-D1) Phase (-D2) 0-10V (-D3) DALI (-D4)

ORDER CODE: (Bold above denotes code)

A	N	L	R	F	6	.	—	—	—	—
---	---	---	---	---	---	---	---	---	---	---

NIGHT RECESSED SMALL

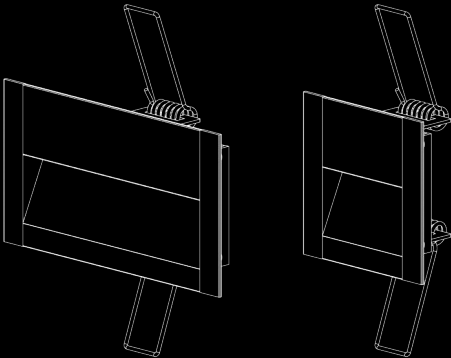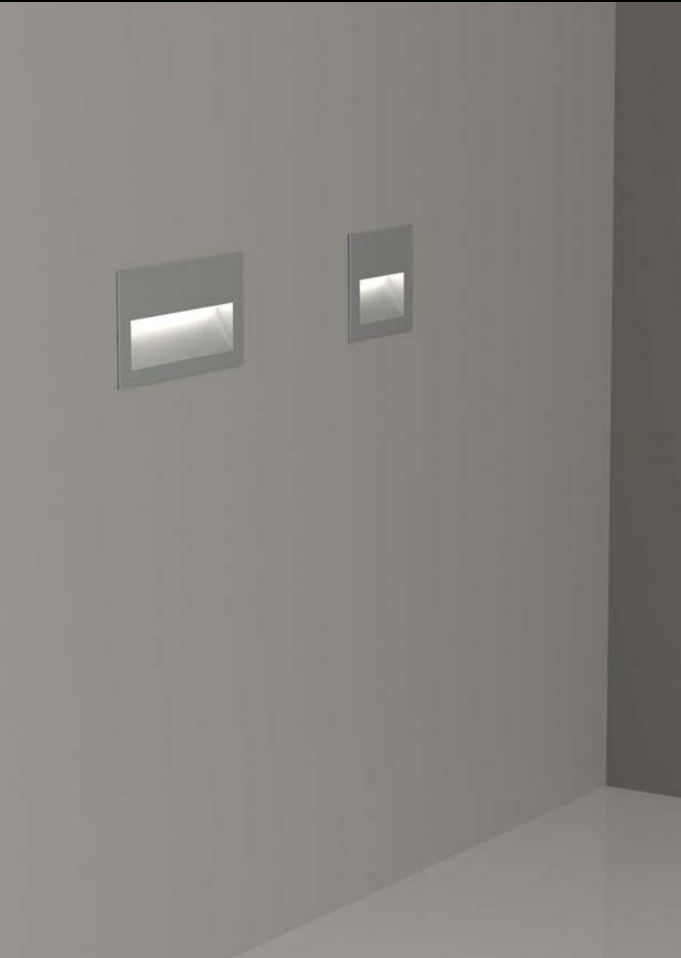

DIMENSIONS




DIAMETER	WIDTH	HEIGHT	LENGTH	CUTOUT
N/A	55mm	32mm	60 & 100mm options	See drawings

TECHNICAL DATA

Lamp Wattage and Delivered Lumens ⁰ :	0.4W : 22lm 0.6W : 33lm	0.8W : 41lm 1.2W : 60lm	
Lamp type:	SMD	Glow wire resistance:	960°
Lamp life:	50,000hrs L70	LED maintenance:	LM80 (L70)
Binning:	3-Step MacAdams	Connector block:	500mm Wire Tails
CRI:	90Ra	Mounting surface classification:	
Control gear:	Remote CV		
Thermal control rating:	IC-4/IC-F (abutted & covered)	Protection classification:	
Materials:	Extruded aluminium with PC diffuser	Standards:	EN/AS/NZS 60598-2-2, 62031, 62471
Supply Voltage:	24V DC	Warranty:	5 years (T&Cs apply)

⁽¹⁾ Delivered lumens are based on 3000K LED

POWERED BY
I B L

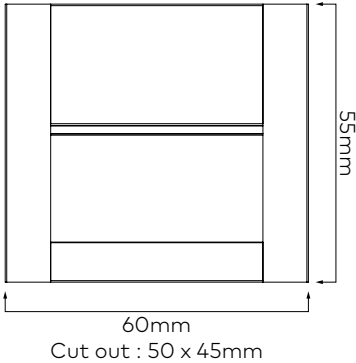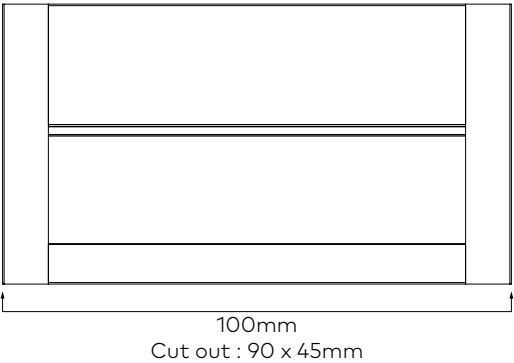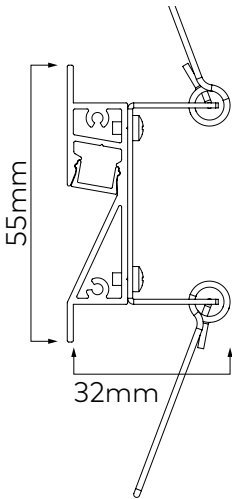


SPECIFICATION

RANGE	STYLE	SIZE	MOUNTING	TYPE	DIFFUSER		FINISH	CCT	LED POWER	DRIVER
Accent	Night	Small	Recessed	Fixed	Flat (6)		White (1) Black (2) Aluminium (5)	2400K (C24) 2700K (C27) 3000K (C30) 4000K (C40) 6000K (C60) Warm Dim Voltage Reducing 2700-1800K (C2718WR)	60mm / 0.4W (004-060) 60mm / 0.6W (006-060) 100mm / 0.8W (008-100) 100mm / 1.2W (012-100)	Non-Dim (-D1) Phase (-D2) 0-10V (-D3) DALI (-D4)

ORDER CODE: (Bold above denotes code)

A	N	S	R	F	6	.	—	—	—	—
---	---	---	---	---	---	---	---	---	---	---

NIGHT SURFACE LARGE

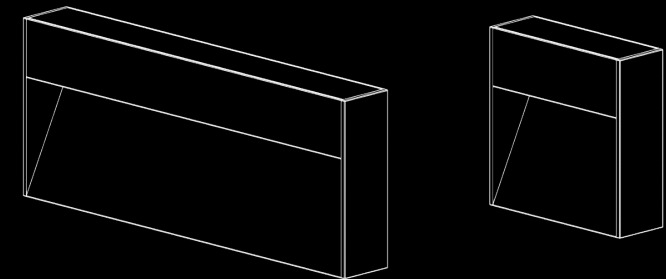

DIMENSIONS


DIAMETER	WIDTH	HEIGHT	LENGTH	CUTOUT
N/A	70mm	25mm	70 & 185mm options	N/A

TECHNICAL DATA

Lamp Wattage and Delivered Lumens®:	0.8W : 44lm 1.2W : 62lm	1.6W : 105lm 2.3W : 144lm	
Lamp type:	SMD	Glow wire resistance:	960°
Lamp life:	50,000hrs L70	LED maintenance:	LM80 (L70)
Binning:	3-Step MacAdams	Connector block:	500mm Wire Tails
CRI:	90Ra	Mounting surface classification:	
Control gear:	Remote CV		
Thermal control rating:	IC-4/IC-F (abutted & covered)	Protection classification:	
Materials:	Extruded aluminium with PC diffuser	Standards:	EN/AS/NZS 60598-2-2, 62031, 62471
Supply Voltage:	24V DC	Warranty:	5 years (T&Cs apply)

(1) Delivered lumens are based on 3000K LED

POWERED BY
IBL

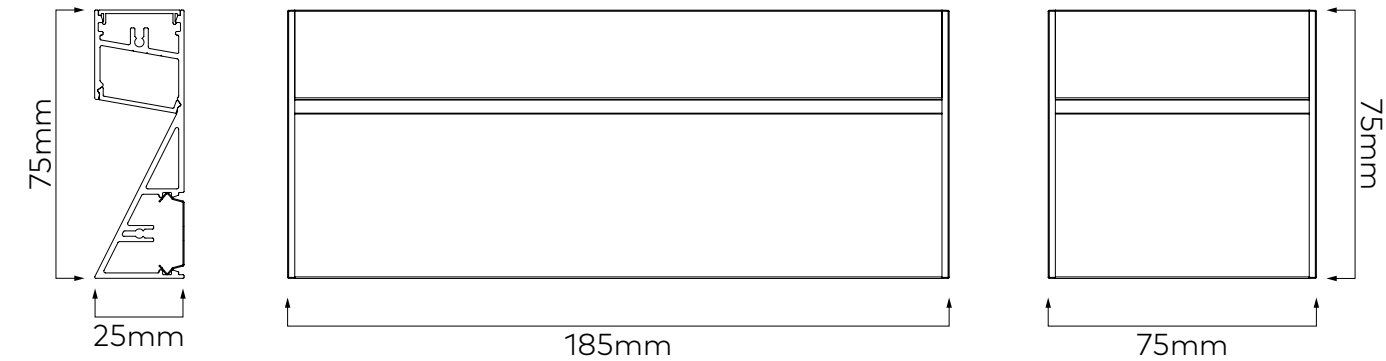


SPECIFICATION

RANGE	STYLE	SIZE	MOUNTING	TYPE	DIFFUSER		FINISH	CCT	LED POWER	DRIVER
Accent	Night	Large	Surface	Fixed	Flat (6)		White (1) Black (2) Aluminium (5)	2400K (C24) 2700K (C27) 3000K (C30) 4000K (C40) 6000K (C60) Warm Dim Voltage Reducing 2700-1800K (C2718WR)	75mm / 0.8W (008-075) 75mm / 1.2W (012-075) 185mm / 1.6W (016-185) 185mm / 2.3W (023-185)	Non-Dim (-D1) Phase (-D2) 0-10V (-D3) DALI (-D4)

ORDER CODE: (Bold above denotes code)

A	N	L	S	F	6	.	—	—	—	—
---	---	---	---	---	---	---	---	---	---	---

NIGHT SURFACE SMALL

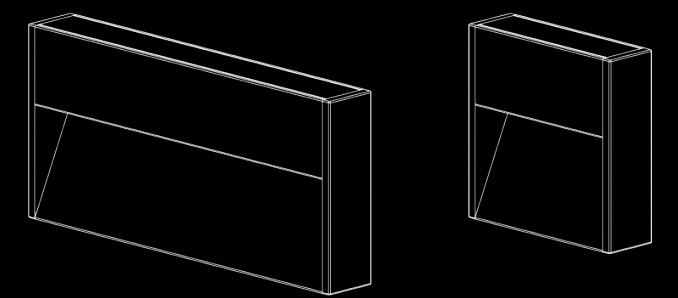

DIMENSIONS


DIAMETER	WIDTH	HEIGHT	LENGTH	CUTOUT
N/A	40mm	12mm	45 & 85mm options	N/A

TECHNICAL DATA

Lamp Wattage and Delivered Lumens ⁽¹⁾ :		0.4W : 22lm 0.6W : 33lm	0.8W : 41lm 1.2W : 60lm
Lamp type:	SMD	Glow wire resistance:	960°
Lamp life:	50,000hrs L70	LED maintenance:	LM80 (L70)
Binning:	3-Step MacAdams	Connector block:	500mm Wire Tails
CRI:	90Ra	Mounting surface classification:	
Control gear:	Remote CV		
Thermal control rating:	IC-4/IC-F (abutted & covered)	Protection classification:	
Materials:	Extruded aluminium with PC diffuser	Standards:	EN/AS/NZS 60598-2-2, 62031, 62471
Supply Voltage:	24V DC	Warranty:	5 years (T&Cs apply)

⁽¹⁾ Delivered lumens are based on 3000K LED

POWERED BY
IBL

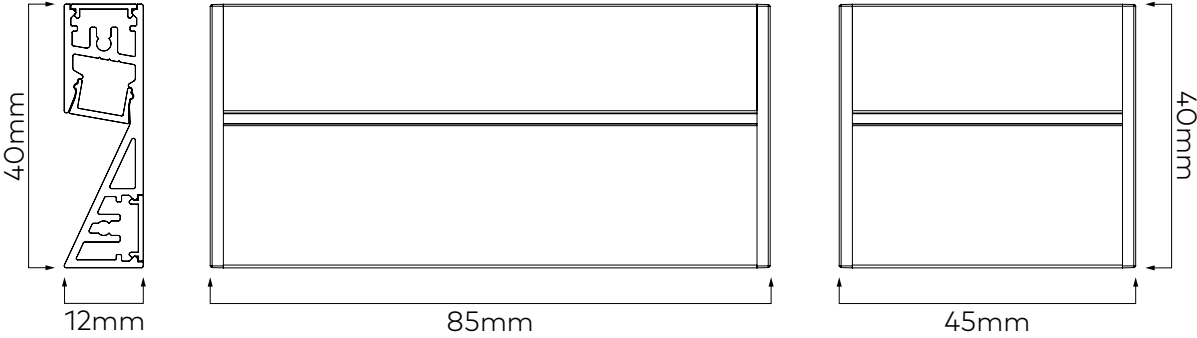

SPECIFICATION

RANGE	STYLE	SIZE	MOUNTING	TYPE	DIFFUSER		FINISH	CCT	LED POWER	DRIVER
Accent	Night	Small	Surface	Fixed	Flat (6)		White (1) Black (2) Aluminium (5)	2400K (C24) 2700K (C27) 3000K (C30) 4000K (C40) 6000K (C60) Warm Dim Voltage Reducing 2700-1800K (C2718WR)	45mm / 0.4W (004-045) 45mm / 0.6W (006-045) 85mm / 0.8W (008-085) 85mm / 1.2W (012-085)	Non-Dim (-D1) Phase (-D2) 0-10V (-D3) DALI (-D4)

ORDER CODE: (Bold above denotes code)

A	N	S	S	F	6	.	—	—	—	—
---	---	---	---	---	---	---	---	---	---	---

lightkit@ibl.co.uk

www.lightkit.co

