


LIGHTKIT



TUBE SERIES




TUBE SERIES is the ultimate lighting designers tool. Offering track, surface, wall and suspended mounting families.

With the LIGHTKIT modular system, offering large, small, mini and micro families, with a constant visual language to ensure continuity in the architectural environment no matter what the scale of the space or mounting options available.

The size and mounting options, together with the interchangeable light engines across the range, ensures consistency in light quality and aesthetic impact.

A deep set light source ensures high levels of glare control, whilst miniaturized light sources and drivers allow for functional lighting solutions in a miniature footprint.

TUBE SPOT LARGE



DIMENSIONS

DIAMETER	WIDTH	HEIGHT	LENGTH	CUTOUT
Ø90mm	N/A	As shown	N/A	As shown


TECHNICAL DATA

Lamp Wattage and Delivered Lumens ⁰ :	19W : 1314lm 25W : 1540lm	19W Warm-Dim : 896lm 25W Warm-Dim: 1210lm	
Lamp type:	Citizen	Glow wire resistance:	850°
Lamp life:	50,000hrs L70	LED maintenance:	Integrated
Binning:	2-Step MacAdams	Connector block:	Flex and Plug
CRI:	90Ra	Mounting surface classification:	
Control gear:	Integral		
Thermal control rating:	IC-4/IC-F (abuttet & covered)	Protection classification:	
Materials:	Cast aluminium, Matt Powder Coated	Standards:	EN/AS/NZS 60598-2-2, 62031, 62471
Supply Voltage:	See page 164	Warranty:	5 years (T&Cs apply)


⁽¹⁾ Delivered lumens are based on medium beam angle and 3000K LED with honeycomb louvre attachment.

POWERED BY
IBL


SURFACE

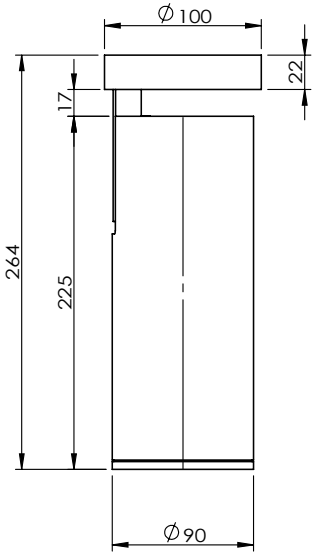

TRACK

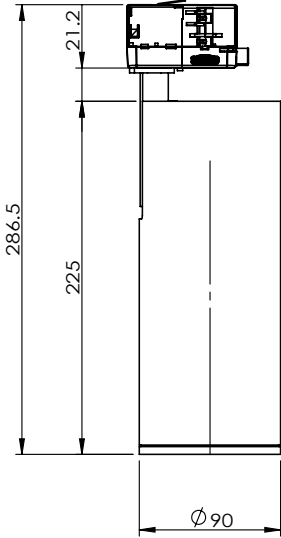

RECESSED

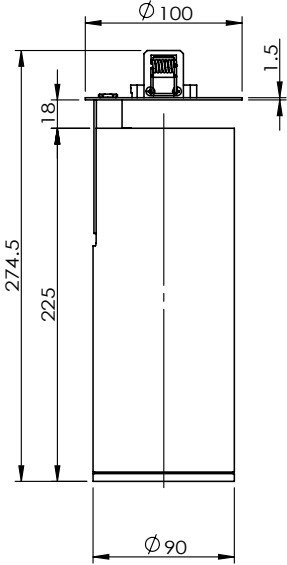


SPECIFICATION

RANGE	STYLE	TYPE	SIZE	BEAM ANGLE		FINISH	CCT	DRIVER	ENGINE/ POWER	MOUNTING	ACCESSORY
Accent	Tube Spot (TS)	Adjustable	Large	15°(L15) 25°(L25) 35°(L35) 60°(L60)		White (1) Black (2)	2700K (2) 3000K (3) 4000K (4) Warm-Dim 3000-2000K (3020)	Non-Dim (1) Phase (2) 0-10V (3) DALI (4)	19W (D19) 25W (D25) Warm Dim (D19W, D25W)	Track Single (T2) Track Multi (T3) Track Multi Data (T5) Surface (S) Recessed (R)	Honeycomb Louvre (-H) Solite Lens (-SO) Spread Lens (-SL)

ORDER CODE: (Bold above denotes code)

A	TS	A	L	—	.	—	—	—	—	—	—
---	----	---	---	---	---	---	---	---	---	---	---

TUBE SPOT SMALL

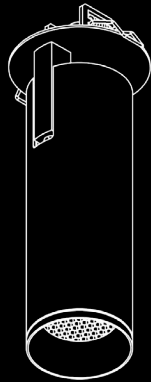

DIMENSIONS

DIAMETER	WIDTH	HEIGHT	LENGTH	CUTOUT
Ø60mm	N/A	As shown	N/A	As shown


TECHNICAL DATA

Lamp Wattage and Delivered Lumens ⁰ :	6W : 422lm 9W : 652lm 12W : 871lm	6W Warm-Dim : 277lm 9W Warm-Dim : 418lm 12W Warm-Dim : 534lm	
Lamp type:	Citizen	Glow wire resistance:	850°
Lamp life:	50,000hrs L70	LED maintenance:	Integrated
Binning:	2-Step MacAdams	Connector block:	Flex and Plug
CRI:	90Ra	Mounting surface classification:	
Control gear:	Integral		
Thermal control rating:	IC-4/IC-F (abuttled & covered)	Protection classification:	
Materials:	Cast aluminium, Matt Powder Coated	Standards:	EN/AS/NZS 60598-2-2, 62031, 62471
Supply Voltage:	See page 164	Warranty:	5 years (T&Cs apply)


⁽¹⁾ Delivered lumens are based on medium beam angle and 3000K LED with honeycomb louvre attachment.

POWERED BY
IBL


SURFACE

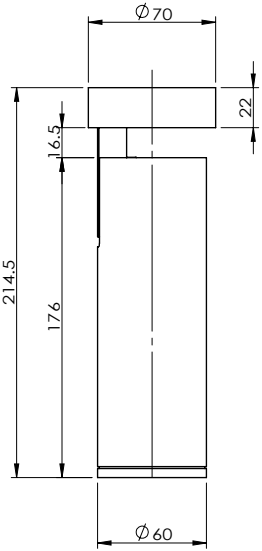

TRACK

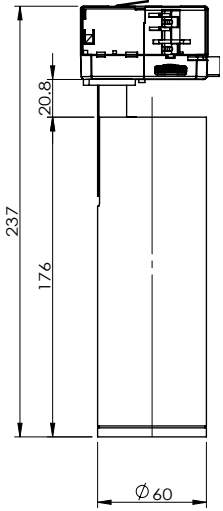

RECESSED

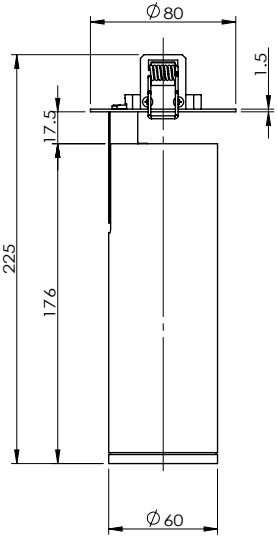

SPECIFICATION


RANGE	STYLE	TYPE	SIZE	BEAM ANGLE		FINISH	CCT	DRIVER	ENGINE/ POWER	MOUNTING	ACCESSORY
Accent	Tube Spot (TS)	Adjustable	Small	10°(L10) [®] 20°(L20) 35°(L35) 45°(L45) 60°(L60)		White (1) Black (2)	2700K (2) 3000K (3) 4000K (4) Warm-Dim 2700-1800K (2718)	Non-Dim (1) Phase (2) 0-10V (3) DALI (4)	6W (BF6) 9W (B9) 12W (C12) Warm Dim (B6W, B9W, C12W)	Track Single (T2) Track Multi (T3) Track Multi Data (T5) Surface (S) Recessed (R)	Honeycomb Louvre (-H) Solite Lens (-SO) Spread Lens (-SL)

[®] 10° option not available with Warm Dim LED

ORDER CODE: (Bold above denotes code)

A	TS	A	S	—	.	—	—	—	—	—	—
---	----	---	---	---	---	---	---	---	---	---	---

TUBE SPOT MINI

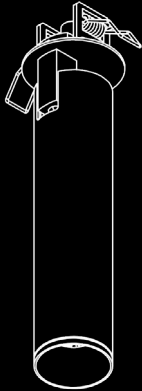

DIMENSIONS


DIAMETER	WIDTH	HEIGHT	LENGTH	CUTOUT
Ø42mm	N/A	As shown	N/A	As shown

TECHNICAL DATA

Lamp Wattage and Delivered Lumens ⁽¹⁾ :		2W : 184lm 5W : 343lm	5W Warm-Dim: 294lm
Lamp type:	Citizen	Glow wire resistance:	850°
Lamp life:	50,000hrs L70	LED maintenance:	Integrated
Binning:	2-Step MacAdams	Connector block:	Flex and Plug
CRI:	90Ra	Mounting surface classification:	
Control gear:	Integral		
Thermal control rating:	IC-4/IC-F (abuttet & covered)	Protection classification:	
Materials:	Cast aluminium, Matt Powder Coated	Standards:	EN/AS/NZS 60598-2-2, 62031, 62471
Supply Voltage:	See page 164	Warranty:	5 years (T&Cs apply)

⁽¹⁾ Delivered lumens are based on medium beam angle and 3000K LED with honeycomb louvre attachment.

POWERED BY
I B L

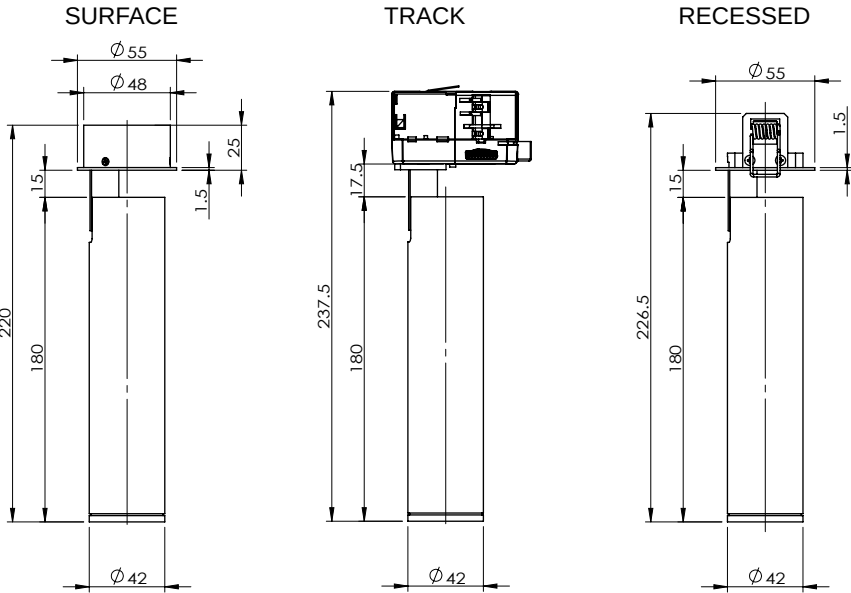


SPECIFICATION

RANGE	STYLE	TYPE	SIZE	BEAM ANGLE		FINISH	CCT	DRIVER	ENGINE/ POWER	MOUNTING	ACCESSORY
Accent	Tube Spot (TS)	Adjustable	Mini (MI)	15°(L15) 25°(L25) 40°(L40)		White (1) Black (2)	2700K (2) 3000K (3) 4000K (4) Warm-Dim 2700-1800K (2718)	Non-Dim (1) Phase (2) 0-10V (3) DALI (4)	2W (A2) 5W (A5) Warm Dim (A5W)	Track Single (T2) Track Multi (T3) Track Multi Data (T5) Surface (S) Recessed (R)	Honeycomb Louvre (-H) Spread Lens (-SL)

ORDER CODE: (Bold above denotes code)

A	TS	A	MI	—	.	—	—	—	—	—	—
---	----	---	----	---	---	---	---	---	---	---	---

TUBE SPOT MICRO

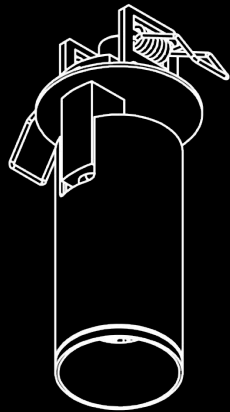

DIMENSIONS

DIAMETER	WIDTH	HEIGHT	LENGTH	CUTOUT
Ø42mm	N/A	As shown	N/A	As shown


TECHNICAL DATA

Lamp Wattage and Delivered Lumens ⁽¹⁾ :	2W : 184lm 5W : 343lm	5W Warm-Dim: 294lm	
Lamp type:	Citizen	Glow wire resistance:	850°
Lamp life:	50,000hrs L70	LED maintenance:	Integrated
Binning:	2-Step MacAdams	Connector block:	Flex and Plug
CRI:	90Ra	Mounting surface classification:	
Control gear:	Remote		
Thermal control rating:	IC-4/IC-F (abuttet & covered)	Protection classification:	
Materials:	Cast aluminium, Matt Powder Coated	Standards:	EN/AS/NZS 60598-2-2, 62031, 62471
Supply Voltage:	See page 164	Warranty:	5 years (T&Cs apply)


(1) Delivered lumens are based on medium beam angle and 3000K LED with honeycomb louvre attachment.

POWERED BY
I B L

SURFACE

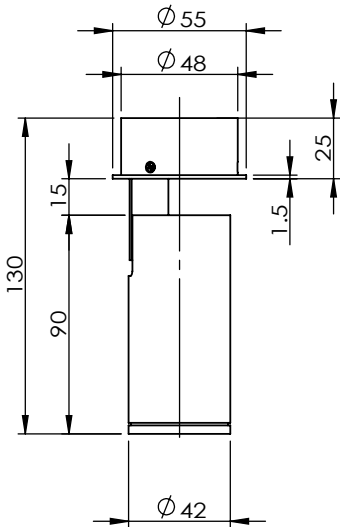

RECESSED

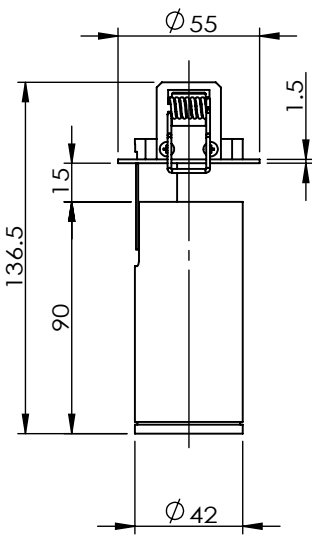

SPECIFICATION


RANGE	STYLE	TYPE	SIZE	BEAM ANGLE		FINISH	CCT	DRIVER	ENGINE/ POWER	MOUNTING	ACCESSORY
Accent	Tube Spot (TS)	Adjustable	Micro (MC)	15°(L15) 25°(L25) 40°(L40)		White (1) Black (2)	2700K (2) 3000K (3) 4000K (4) Warm-Dim 2700-1800K (2718)	Non-Dim (1) Phase (2) 0-10V (3) DALI (4)	2W (A2) 5W (A5) Warm Dim (A5W)	Track Single (T2) Track Multi (T3) Track Multi Data (T5) Surface (S) Recessed (R)	Honeycomb Louvre (-H) Spread Lens (-SL)

ORDER CODE:

(Bold above denotes code)

A	TS	A	MC	—	.	—	—	—	—	—	—
---	----	---	----	---	---	---	---	---	---	---	---

TUBE SURFACE LARGE



DIMENSIONS


DIAMETER	WIDTH	HEIGHT	LENGTH	CUTOUT
Ø90mm	N/A	225mm	N/A	N/A

TECHNICAL DATA

Lamp Wattage and Delivered Lumens ⁰ :	19W : 1314lm 25W : 1540lm	19W Warm-Dim : 896lm 25W Warm-Dim: 1210lm	
Lamp type:	Citizen	Glow wire resistance:	850°
Lamp life:	50,000hrs L70	LED maintenance:	Integrated
Binning:	2-Step MacAdams	Connector block:	Flex and Plug
CRI:	90Ra	Mounting surface classification:	
Control gear:	Integral		
Thermal control rating:	IC-4/IC-F (abutted & covered)	Protection classification:	
Materials:	Cast aluminium, Matt Powder Coated	Standards:	EN/AS/NZS 60598-2-2, 62031, 62471
Supply Voltage:	See page 164	Warranty:	5 years (T&Cs apply)

⁽¹⁾ Delivered lumens are based on medium beam angle and 3000K LED with honeycomb louvre attachment.

POWERED BY
IBL

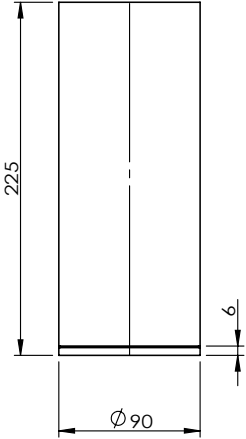

SPECIFICATION


RANGE	STYLE	TYPE	SIZE	BEAM ANGLE		FINISH	CCT	DRIVER	ENGINE/POWER	ACCESSORY
Accent	Tube Surface (TS)	Fixed	Large	15°(L15) 25°(L25) 35°(L35) 60°(L60)		White (1) Black (2)	2700K (2) 3000K (3) 4000K (4) Warm-Dim 3000-2000K (3020)	Non-Dim (1) Phase (2) 0-10V (3) DALI (4)	19W (D19) 25W (D25) Warm Dim (D19W, D25W)	Honeycomb Louvre (-H) Solite Lens (-SO) Spread Lens (-SL)

ORDER CODE:

(Bold above denotes code)

A	TS	F	L	—	.	—	—	—	—	—
---	----	---	---	---	---	---	---	---	---	---

TUBE SURFACE SMALL



DIMENSIONS


DIAMETER	WIDTH	HEIGHT	LENGTH	CUTOUT
Ø60mm	N/A	120mm	N/A	N/A

TECHNICAL DATA

Lamp Wattage and Delivered Lumens ⁽¹⁾ :	6W : 422lm	6W Warm-Dim : 277lm	
	9W : 652lm	9W Warm-Dim : 418lm	
	12W : 871lm	12W Warm-Dim : 534lm	
Lamp type:	Citizen	Glow wire resistance:	850°
Lamp life:	50,000hrs L70	LED maintenance:	Integrated
Binning:	2-Step MacAdams	Connector block:	Flex and Plug
CRI:	90Ra	Mounting surface classification:	
Control gear:	Integral		
Thermal control rating:	IC-4/IC-F (abuttled & covered)	Protection classification:	
Materials:	Cast aluminium, Matt Powder Coated	Standards:	EN/AS/NZS 60598-2-2, 62031, 62471
Supply Voltage:	See page 164	Warranty:	5 years (T&Cs apply)

⁽¹⁾ Delivered lumens are based on medium beam angle and 3000K LED with honeycomb louvre attachment.

POWERED BY
IBL

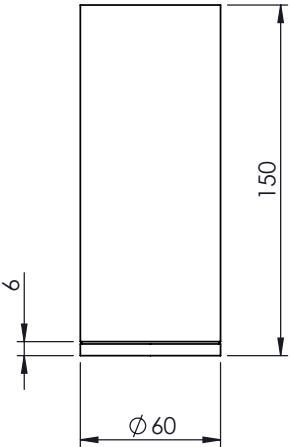

SPECIFICATION



RANGE	STYLE	TYPE	SIZE	BEAM ANGLE		FINISH	CCT	DRIVER	ENGINE/POWER	ACCESSORY
Accent	Tube Surface (TS)	Fixed	Small	10°(L10) [®] 20°(L20) 35°(L35) 45°(L45) 60°(L60)		White (1) Black (2)	2700K (2) 3000K (3) 4000K (4) Warm-Dim 2700-1800K (2718)	Non-Dim (1) Phase (2) 0-10V (3) DALI (4)	6W (BF6) 9W (B9) 12W (C12) Warm Dim (B6W, B9W, C12W)	Honeycomb Louvre (-H) Solite Lens (-SO) Spread Lens (-SL)

[®] 10° option not available with Warm Dim LED

ORDER CODE: (Bold above denotes code)

A	TS	F	S	—	.	—	—	—	—	—
---	----	---	---	---	---	---	---	---	---	---

TUBE SURFACE MINI

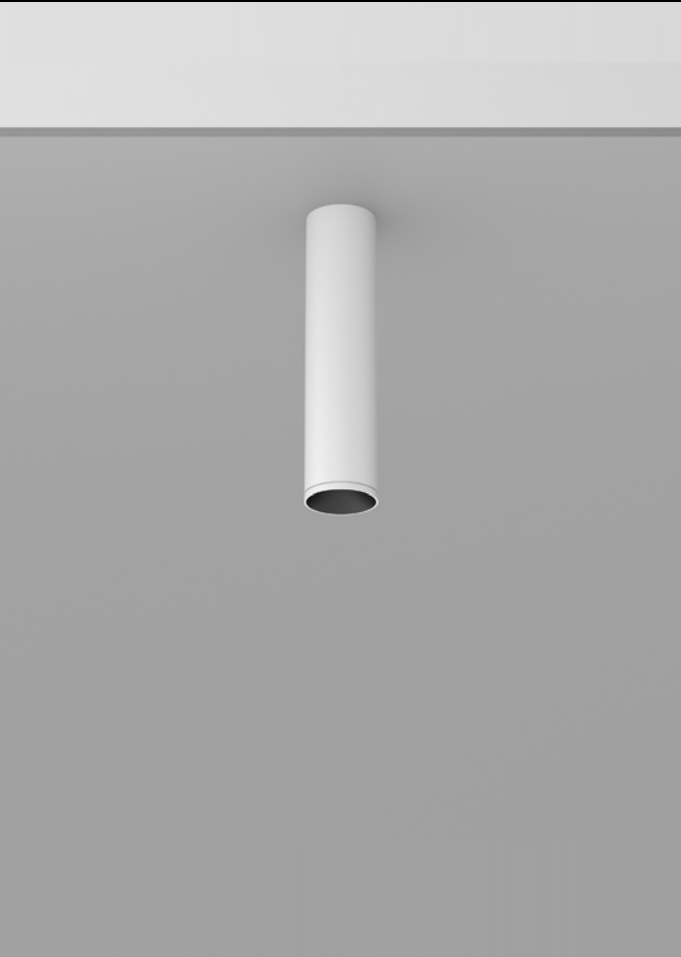

DIMENSIONS


DIAMETER	WIDTH	HEIGHT	LENGTH	CUTOUT
Ø42mm	N/A	180mm	N/A	N/A

TECHNICAL DATA

Lamp Wattage and Delivered Lumens ⁽¹⁾ :	2W : 184lm 5W : 343lm	5W Warm-Dim: 294lm	
Lamp type:	Citizen	Glow wire resistance:	850°
Lamp life:	50,000hrs L70	LED maintenance:	Integrated
Binning:	2-Step MacAdams	Connector block:	Flex and Plug
CRI:	90Ra	Mounting surface classification:	
Control gear:	Integral		
Thermal control rating:	IC-4/IC-F (abuttet & covered)	Protection classification:	
Materials:	Cast aluminium, Matt Powder Coated	Standards:	EN/AS/NZS 60598-2-2, 62031, 62471
Supply Voltage:	See page 164	Warranty:	5 years (T&Cs apply)

⁽¹⁾ Delivered lumens are based on medium beam angle and 3000K LED with honeycomb louvre attachment

POWERED BY
IBL

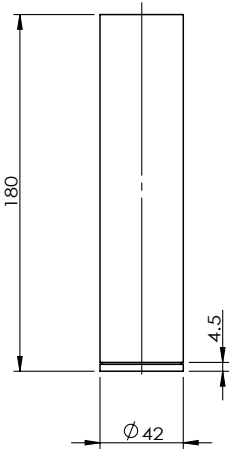

SPECIFICATION



RANGE	STYLE	TYPE	SIZE	BEAM ANGLE		FINISH	CCT	DRIVER	ENGINE/POWER	ACCESSORY
Accent	Tube Surface (TS)	Fixed	Mini (MI)	15°(L15) 25°(L25) 40°(L40)		White (1) Black (2)	2700K (2) 3000K (3) 4000K (4) Warm-Dim 2700-1800K (2718)	Non-Dim (1) Phase (2) 0-10V (3) DALI (4)	2W (A2) 5W (A5) 5W Warm Dim (A5W)	Honeycomb Louvre (-H) Solite Lens (-SO)

ORDER CODE:

(Bold above denotes code)

A	TS	F	MI	—	.	—	—	—	—	—
---	----	---	----	---	---	---	---	---	---	---

TUBE SURFACE MICRO

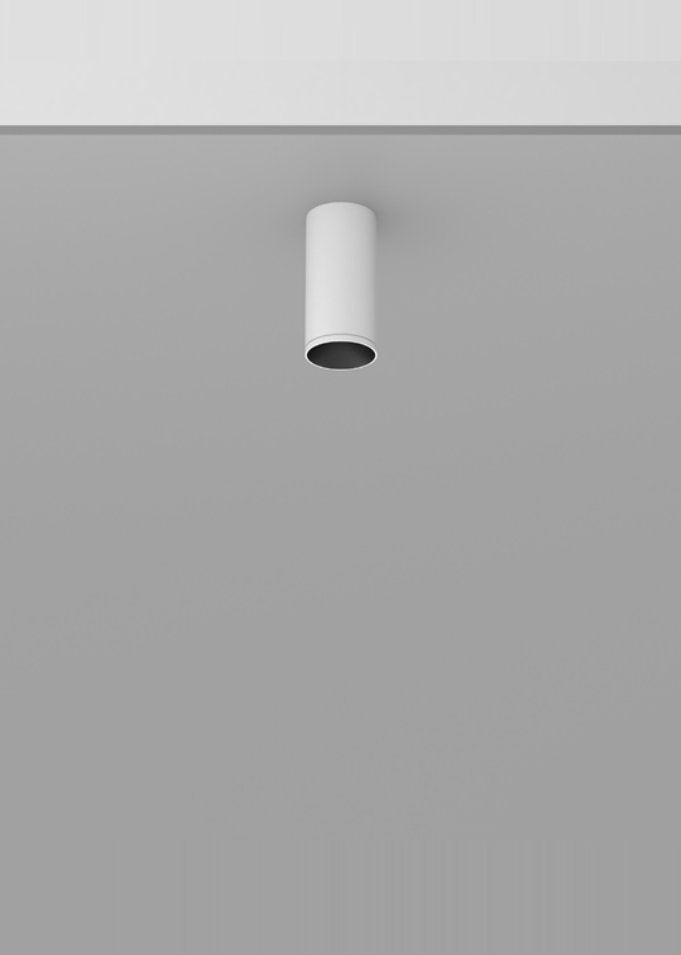

DIMENSIONS


DIAMETER	WIDTH	HEIGHT	LENGTH	CUTOUT
Ø42mm	N/A	90mm	N/A	N/A

TECHNICAL DATA

Lamp Wattage and Delivered Lumens ⁽¹⁾ :	2W : 184lm 5W : 343lm	5W Warm-Dim: 294lm	
Lamp type:	Citizen	Glow wire resistance:	850°
Lamp life:	50,000hrs L70	LED maintenance:	Integrated
Binning:	2-Step MacAdams	Connector block:	Flex and Plug
CRI:	90Ra	Mounting surface classification:	
Control gear:	Remote		
Thermal control rating:	IC-4/IC-F (abuttet & covered)	Protection classification:	
Materials:	Cast aluminium, Matt Powder Coated	Standards:	EN/AS/NZS 60598-2-2, 62031, 62471
Supply Voltage:	See page 164	Warranty:	5 years (T&Cs apply)

⁽¹⁾ Delivered lumens are based on medium beam angle and 3000K LED with honeycomb louvre attachment

POWERED BY
IBL




SPECIFICATION

RANGE	STYLE	TYPE	SIZE	BEAM ANGLE		FINISH	CCT	DRIVER	ENGINE/POWER	ACCESSORY
Accent	Tube Surface (TS)	Fixed	Micro (MC)	15°(L15) 25°(L25) 40°(L40)		White (1) Black (2)	2700K (2) 3000K (3) 4000K (4) Warm-Dim 2700-1800K (2718)	Non-Dim (1) Phase (2) 0-10V (3) DALI (4)	2W (A2) 5W (A5) 5W Warm Dim (A5W)	Honeycomb Louvre (-H) Solite Lens (-SO)

ORDER CODE: (Bold above denotes code)

A	TS	F	MC	—	.	—	—	—	—	—
---	----	---	----	---	---	---	---	---	---	---

TUBE SUSPENDED LARGE

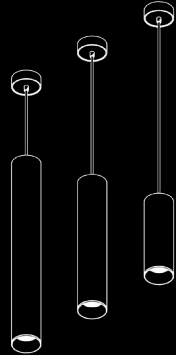

DIMENSIONS


DIAMETER	WIDTH	HEIGHT	LENGTH	CUTOUT
Ø90mm	N/A	As shown	N/A	As shown

TECHNICAL DATA

Lamp Wattage and Delivered Lumens [®] :	19W : 1314lm 25W : 1540lm	19W Warm-Dim : 896lm 25W Warm-Dim: 1210lm	
Lamp type:	Citizen	Glow wire resistance:	850°
Lamp life:	50,000hrs L70	LED maintenance:	Integrated
Binning:	2-Step MacAdams	Connector block:	Flex and Plug
CRI:	90Ra	Mounting surface classification:	
Control gear:	Integral		
Thermal control rating:	IC-4/IC-F (abuttled & covered)	Protection classification:	
Materials:	Cast aluminium, Matt Powder Coated	Standards:	EN/AS/NZS 60598-2-2, 62031, 62471
Supply Voltage:	See page 164	Warranty:	5 years (T&Cs apply)

(1) Delivered lumens are based on medium beam angle and 3000K LED with honeycomb louvre attachment

POWERED BY
IBL

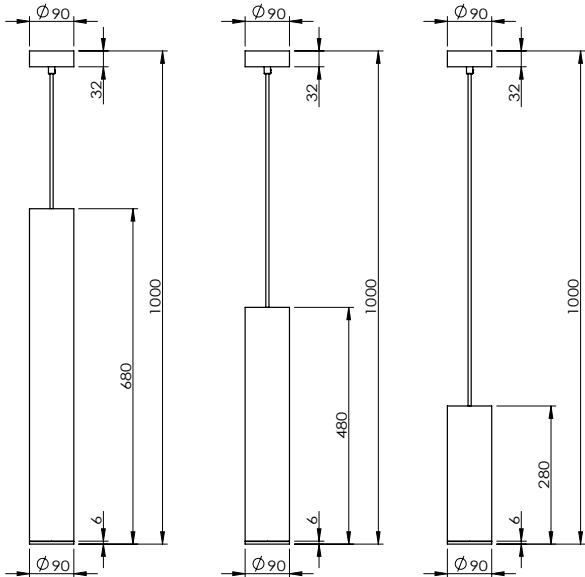



SPECIFICATION

RANGE	STYLE	SIZE	BEAM ANGLE		COLOUR	CCT	DRIVER	ENGINE/POWER	MOUNTING	TUBE LENGTH	ROD / WIRE	ACCESSORY
Accent	Tube Suspended (TSS)	Large	15°(L15) 25°(L25) 35°(L35) 60°(L60)		White (1) Black (2)	2700K (2) 3000K (3) 4000K (4) Warm Dim 3000K-2000K (3020)	Non-Dim (1) Phase (2) 0-10V (3) DALI (4)	19W (D19) 25W (D25) Warm-Dim (D19W, D25W)	Track Single (T2) Track Multi (T3) Track Multi Data (T5) Surface (S)	280mm (-L280) 480mm (-L480) 680mm (-L680)	1m Rod (-R10) 2m Rod (-R20) 1m Wire (-W10) 2m Wire (-W20) 3m Wire (-W30)	Honeycomb Louvre (-H) Solite Lens (-SO) Spread Lens (-SL)

ORDER CODE: (Bold above denotes code)

A	TSS	L	—	.	—	—	—	—	—	—	—	—
---	-----	---	---	---	---	---	---	---	---	---	---	---

TUBE SUSPENDED SMALL

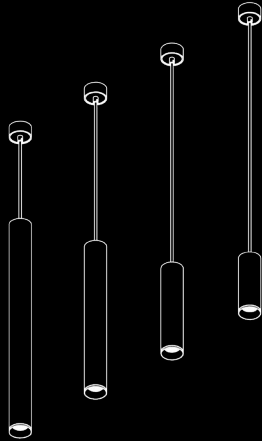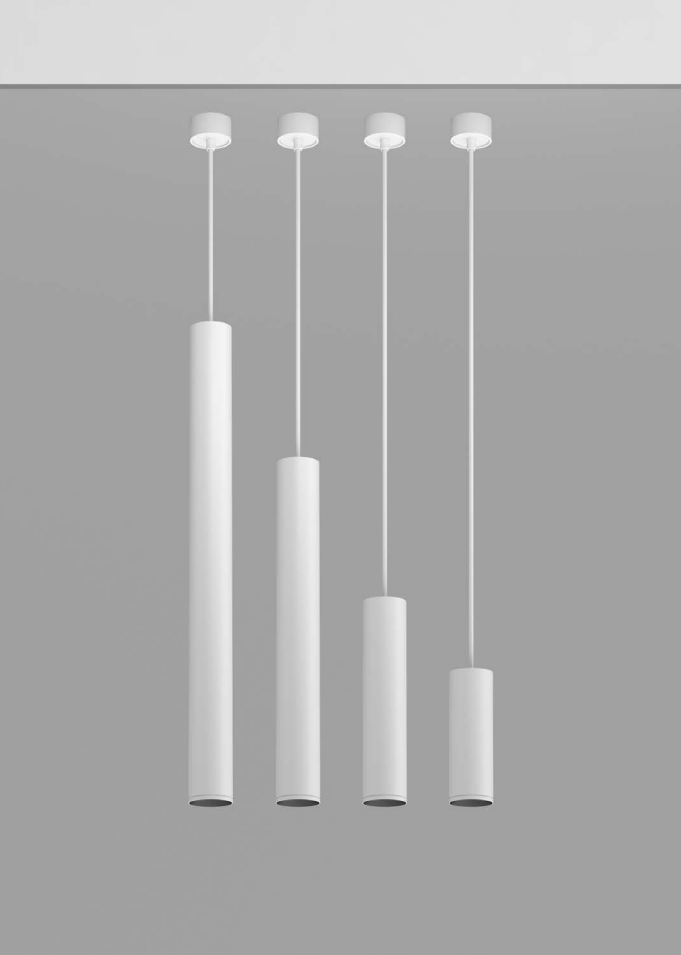

DIMENSIONS


DIAMETER	WIDTH	HEIGHT	LENGTH	CUTOUT
Ø60mm	N/A	As shown	N/A	As shown

TECHNICAL DATA

Lamp Wattage and Delivered Lumens®:	6W : 422lm 9W : 652lm 12W : 871lm	6W Warm-Dim : 277lm 9W Warm-Dim : 418lm 12W Warm-Dim : 534lm	
Lamp type:	Citizen	Glow wire resistance:	850°
Lamp life:	50,000hrs L70	LED maintenance:	Integrated
Binning:	2-Step MacAdams	Connector block:	Flex and Plug
CRI:	90Ra	Mounting surface classification:	
Control gear:	Integral		
Thermal control rating:	IC-4/IC-F (abuttled & covered)	Protection classification:	
Materials:	Cast aluminium, Matt Powder Coated	Standards:	EN/AS/NZS 60598-2-2, 62031, 62471
Supply Voltage:	See page 164	Warranty:	5 years (T&Cs apply)

(1) Delivered lumens are based on medium beam angle and 3000K LED with honeycomb louvre attachment

POWERED BY
IBL

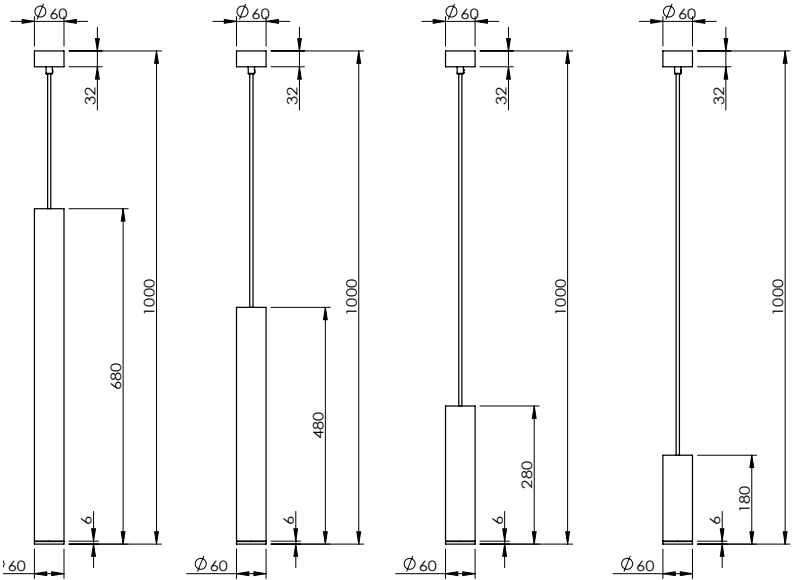

SPECIFICATION



RANGE	STYLE	SIZE	BEAM ANGLE		COLOUR	CCT	DRIVER	ENGINE/POWER	MOUNTING	TUBE LENGTH	ROD / WIRE	ACCESSORY
Accent	Tube Suspended (TSS)	Small	10°(L10) ⁽¹⁾ 20°(L20) 35°(L35) 45°(L45) 60°(L60)		White (1) Black (2)	2700K (2) 3000K (3) 4000K (4) Warm Dim 2700K-1800K (2718)	Non-Dim (1) Phase (2) 0-10V (3) DALI (4)	6W (BF6) 9W (B9) 12W (C12) Warm-Dim (D19W, D25W)	Track Single (T2) Track Multi (T3) Track Multi Data (T5) Surface (S)	180mm (-L180) 280mm (-L280) 480mm (-L480) 680mm (-L680)	1m Rod (-R10) 2m Rod (-R20) 1m Wire (-W10) 2m Wire (-W20) 3m Wire (-W30)	Honeycomb Louvre (-H) Solite Lens (-SO) Spread Lens (-SL)

® 10° option not available with Warm Dim LED

ORDER CODE: (Bold above denotes code)

A	TSS	S	—	.	—	—	—	—	—	—	—	—
---	-----	---	---	---	---	---	---	---	---	---	---	---

TUBE SUSPENDED MINI

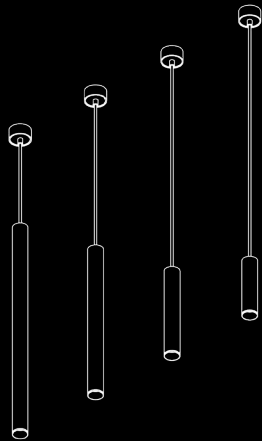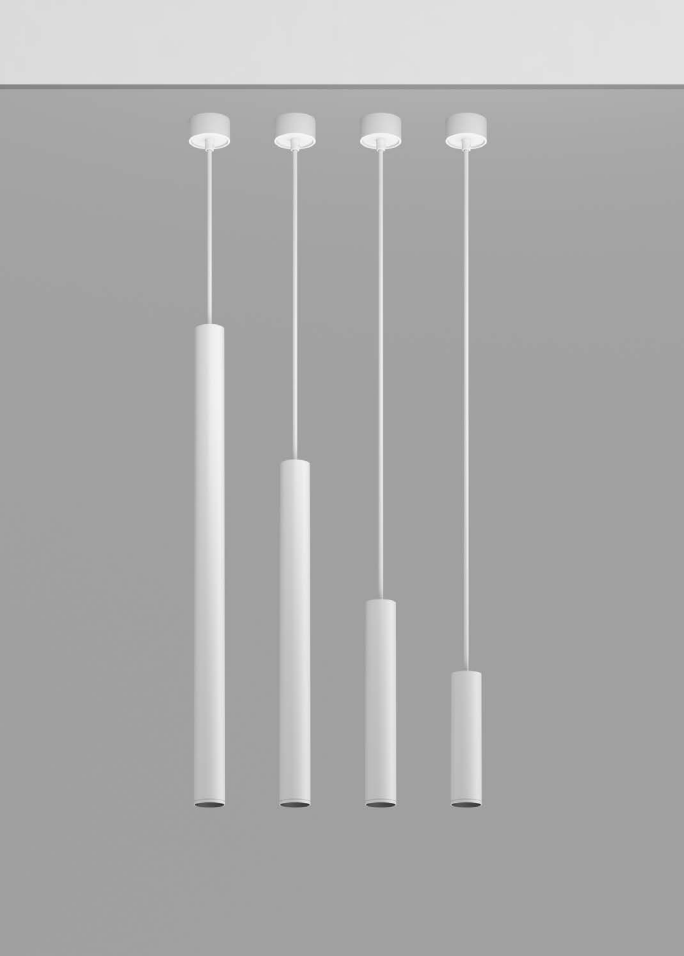

DIMENSIONS


DIAMETER	WIDTH	HEIGHT	LENGTH	CUTOUT
Ø42mm	N/A	As shown	N/A	As shown

TECHNICAL DATA

Lamp Wattage and Delivered Lumens ⁰ :	2W : 184lm 5W : 343lm		5W Warm-Dim: 294lm	
Lamp type:	Citizen	Glow wire resistance:	850°	
Lamp life:	50,000hrs L70	LED maintenance:	Integrated	
Binning:	2-Step MacAdams	Connector block:	Flex and Plug	
CRI:	90Ra	Mounting surface classification:		
Control gear:	Integral			
Thermal control rating:	IC-4/IC-F (abuttled & covered)	Protection classification:		
Materials:	Cast aluminium, Matt Powder Coated	Standards:	EN/AS/NZS 60598-2-2, 62031, 62471	
Supply Voltage:	See page 164	Warranty:	5 years (T&Cs apply)	

⁽¹⁾ Delivered lumens are based on medium beam angle and 3000K LED with honeycomb louvre attachment

POWERED BY
IBL

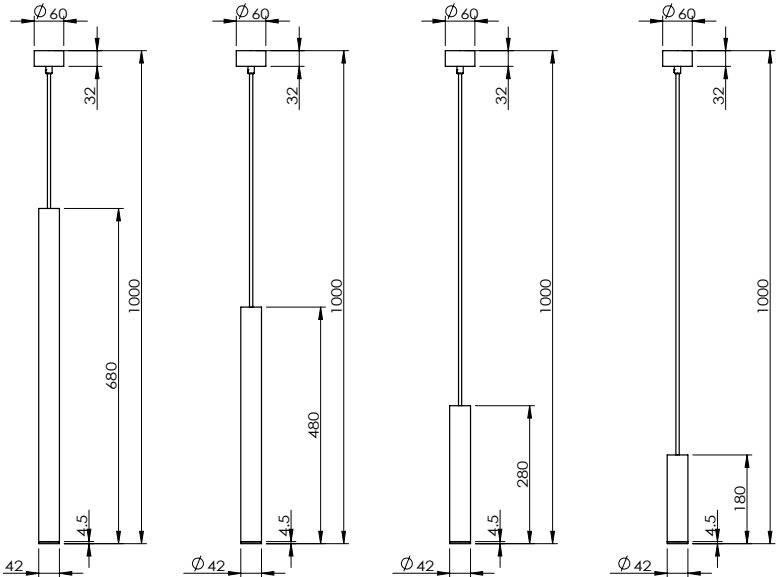

SPECIFICATION

RANGE	STYLE	SIZE	BEAM ANGLE		COLOUR	CCT	DRIVER	ENGINE/POWER	MOUNTING	TUBE LENGTH	ROD / WIRE	ACCESSORY
Accent	Tube Suspended (TSS)	Mini (MI)	15°(L15) 25°(L25) 40°(L40)		White (1) Black (2)	2700K (2) 3000K (3) 4000K (4) Warm Dim 2700K-1800K (2718)	Non-Dim (1) Phase (2) 0-10V (3) DALI (4)	2W (A2) 5W (A5) 5W Warm-Dim (5W)	Track Single (T2) Track Multi (T3) Track Multi Data (T5) Surface (S)	180mm (-L180) 280mm (-L280) 480mm (-L480) 680mm (-L680)	1m Rod (-R10) 2m Rod (-R20) 1m Wire (-W10) 2m Wire (-W20) 3m Wire (-W30)	Honeycomb Louvre (-H) Solite Lens (-SO)

ORDER CODE: (Bold above denotes code)

A	TSS	MI	—	.	—	—	—	—	—	—	—	—
---	-----	----	---	---	---	---	---	---	---	---	---	---

TUBE SUSPENDED MICRO



DIMENSIONS


DIAMETER	WIDTH	HEIGHT	LENGTH	CUTOUT
Ø42mm	N/A	As shown	N/A	As shown

TECHNICAL DATA

Lamp Wattage and Delivered Lumens ⁰ :	2W : 184lm 5W : 343lm		5W Warm-Dim: 294lm	
Lamp type:	Citizen	Glow wire resistance:	850°	
Lamp life:	50,000hrs L70	LED maintenance:	Integrated	
Binning:	2-Step MacAdams	Connector block:	Flex and Plug	
CRI:	90Ra	Mounting surface classification:		
Control gear:	Remote			
Thermal control rating:	IC-4/IC-F (abutted & covered)	Protection classification:		
Materials:	Cast aluminium, Matt Powder Coated	Standards:	EN/AS/NZS 60598-2-2, 62031, 62471	
Supply Voltage:	See page 164	Warranty:	5 years (T&Cs apply)	

⁽¹⁾ Delivered lumens are based on medium beam angle and 3000K LED with honeycomb louvre attachment.

POWERED BY
IBL

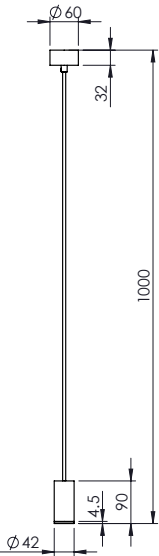


SPECIFICATION

RANGE	STYLE	SIZE	BEAM ANGLE		COLOUR	CCT	DRIVER	ENGINE/POWER	MOUNTING	TUBE LENGTH	ROD / WIRE	ACCESSORY
Accent	Tube Suspended (TSS)	Micro (MC)	15°(L15) 25°(L25) 40°(L40)		White (1) Black (2)	2700K (2) 3000K (3) 4000K (4) Warm Dim 2700K-1800K (2718)	Non-Dim (1) Phase (2) 0-10V (3) DALI (4)	2W (A2) 5W (A5) 5W Warm-Dim (5W)	Track Single (T2) Track Multi (T3) Track Multi Data (T5) Surface (S)	80mm (-L080)	1m Rod (-R10) 2m Rod (-R20) 1m Wire (-W10) 2m Wire (-W20) 3m Wire (-W30)	Honeycomb Louvre (-H) Solite Lens (-SO)

ORDER CODE: (Bold above denotes code)

A	TSS	MC	—	.	—	—	—	—	—	—	—	—
---	-----	----	---	---	---	---	---	---	---	---	---	---

TUBE WALL DOWN LARGE

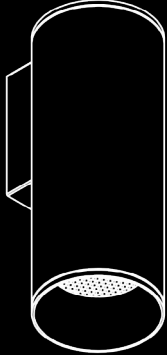

DIMENSIONS


DIAMETER	WIDTH	HEIGHT	LENGTH	CUTOUT
Ø90mm	N/A	230mm	N/A	N/A

TECHNICAL DATA

Lamp Wattage and Delivered Lumens ⁰ :	19W : 1314lm 25W : 1540lm	19W Warm-Dim: 896lm 25W Warm-Dim: 1210lm	
Lamp type:	Citizen	Glow wire resistance:	850°
Lamp life:	50,000hrs L70	LED maintenance:	Integrated
Binning:	2-Step MacAdams	Connector block:	Flex and Plug
CRI:	90Ra	Mounting surface classification:	
Control gear:	Integral		
Thermal control rating:	IC-4/IC-F (abuttet & covered)	Protection classification:	
Materials:	Cast aluminium, Matt Powder Coated	Standards:	EN/AS/NZS 60598-2-2, 62031, 62471
Supply Voltage:	See page 164	Warranty:	5 years (T&Cs apply)

⁽¹⁾ Delivered lumens are based on medium beam angle and 3000K LED with honeycomb louvre attachment.

POWERED BY
IBL

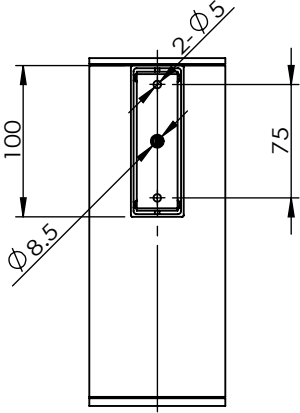

SPECIFICATION


RANGE	STYLE	SIZE	MOUNTING	TYPE	BEAM ANGLE		COLOUR	CCT	DRIVER	ENGINE/POWER	ACCESSORY
Accent	Tube Surface (TSF)	Large	Wall	Down	15°(L15) 25°(L25) 35°(L35) 60°(L60)		White (1) Black (2)	2700K (2) 3000K (3) 4000K (4) Warm Dim 2700K-1800K (2718)	Non-Dim (1) Phase (2) 0-10V (3) DALI (4)	19W (D19) 25W (D23) Warm-Dim (D19W, D25W)	Honeycomb Louvre (-H) Solite Lens (-SO)

ORDER CODE:

(Bold above denotes code)

A	TSF	L	W	D	—	.	—	—	—	—	—
---	-----	---	---	---	---	---	---	---	---	---	---

TUBE WALL DOWN SMALL



DIMENSIONS


DIAMETER	WIDTH	HEIGHT	LENGTH	CUTOUT
Ø60mm	N/A	130mm	N/A	N/A

TECHNICAL DATA

Lamp Wattage and Delivered Lumens®:	6W : 422lm 9W : 652lm 12W : 871lm	6W Warm-Dim: 277lm 9W Warm-Dim: 418lm 12W Warm-Dim: 534lm	
Lamp type:	Citizen	Glow wire resistance:	850°
Lamp life:	50,000hrs L70	LED maintenance:	Integrated
Binning:	2-Step MacAdams	Connector block:	Flex and Plug
CRI:	90Ra	Mounting surface classification:	
Control gear:	Integral	Protection classification:	
Thermal control rating:	IC-4/IC-F (abuttet & covered)		
Materials:	Cast aluminium, Matt Powder Coated	Standards:	EN/AS/NZS 60598-2-2, 62031, 62471
Supply Voltage:	See page 164	Warranty:	5 years (T&Cs apply)

(1) Delivered lumens are based on medium beam angle and 3000K LED with honeycomb louvre attachment

POWERED BY
IBL

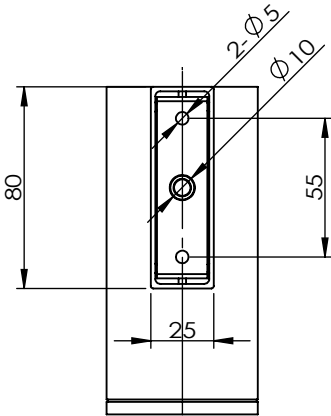

SPECIFICATION



RANGE	STYLE	SIZE	MOUNTING	TYPE	BEAM ANGLE	COLOUR	CCT	DRIVER	ENGINE/POWER	ACCESSORY
Accent	Tube Surface (TSF)	Small	Wall	Down	10°(L10) 20°(L20) 35°(L35) 45°(L45) 60°(L60)	White (1) Black (2)	2700K (2) 3000K (3) 4000K (4) Warm Dim 2700K-1800K (2718)	Non-Dim (1) Phase (2) 0-10V (3) DALI (4)	6W (BF6) 9W (B9) 12W (C12) Warm-Dim (B6W, B9W, C12W)	Honeycomb Louvre (-H) Solite Lens (-SO)

ORDER CODE:

(Bold above denotes code)

A	TSF	S	W	D	—	.	—	—	—	—	—
---	-----	---	---	---	---	---	---	---	---	---	---

TUBE WALL DOWN MINI

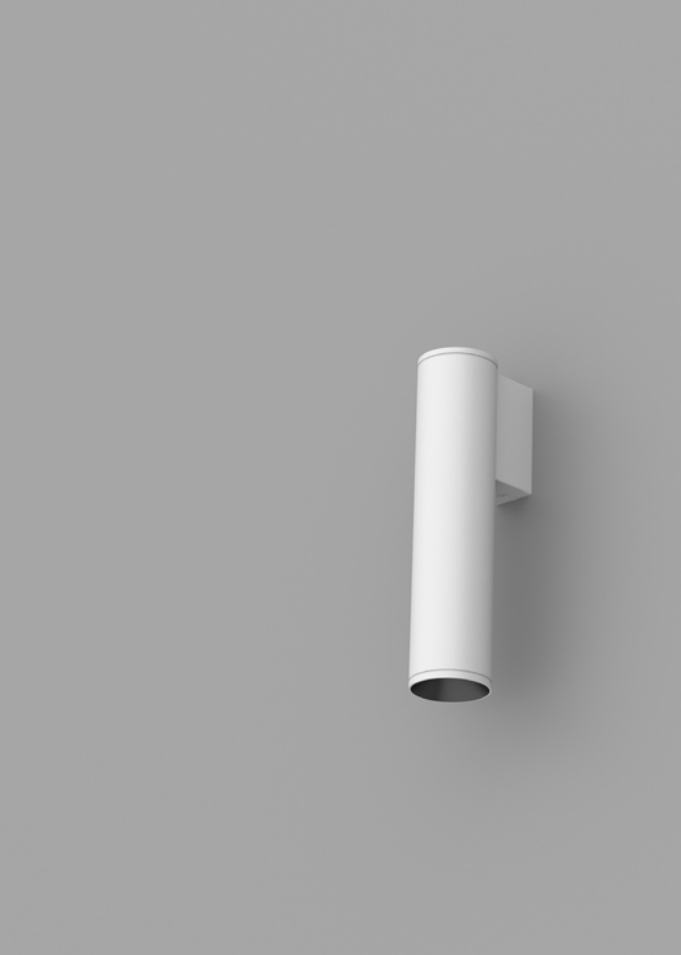

DIMENSIONS


DIAMETER	WIDTH	HEIGHT	LENGTH	CUTOUT
Ø42mm	N/A	180mm	N/A	N/A

TECHNICAL DATA

Lamp Wattage and Delivered Lumens ⁽¹⁾ :	2W : 184lm 5W : 343lm	5W Warm-Dim: 294lm	
Lamp type:	Citizen	Glow wire resistance:	850°
Lamp life:	50,000hrs L70	LED maintenance:	Integrated
Binning:	2-Step MacAdams	Connector block:	Flex and Plug
CRI:	90Ra	Mounting surface classification:	
Control gear:	Integral		
Thermal control rating:	IC-4/IC-F (abuttet & covered)	Protection classification:	
Materials:	Cast aluminium, Matt Powder Coated	Standards:	EN/AS/NZS 60598-2-2, 62031, 62471
Supply Voltage:	See page 164	Warranty:	5 years (T&Cs apply)

⁽¹⁾ Delivered lumens are based on medium beam angle and 3000K LED with honeycomb louvre attachment

POWERED BY
I B L

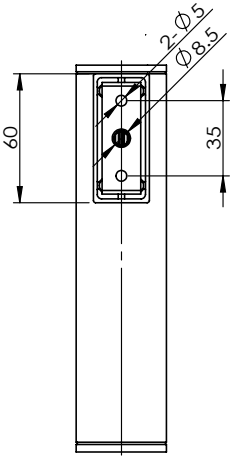

SPECIFICATION



RANGE	STYLE	SIZE	MOUNTING	TYPE	BEAM ANGLE	COLOUR	CCT	DRIVER	ENGINE/POWER	ACCESSORY
Accent	Tube Surface (TSF)	Mini (MI)	Wall	Down	15°(L15) 25°(L25) 40°(L40)	White (1) Black (2)	2700K (2) 3000K (3) 4000K (4) Warm Dim 2700K-1800K (2718)	Non-Dim (1) Phase (2) 0-10V (3) DALI (4)	2W (A2) 5W (A5) 5W Warm-Dim (A5W)	Honeycomb Louvre (-H) Solite Lens (-SO)

ORDER CODE:

(Bold above denotes code)

A	TSF	MI	W	D	—	.	—	—	—	—	—
---	-----	----	---	---	---	---	---	---	---	---	---

TUBE WALL DOWN MICRO

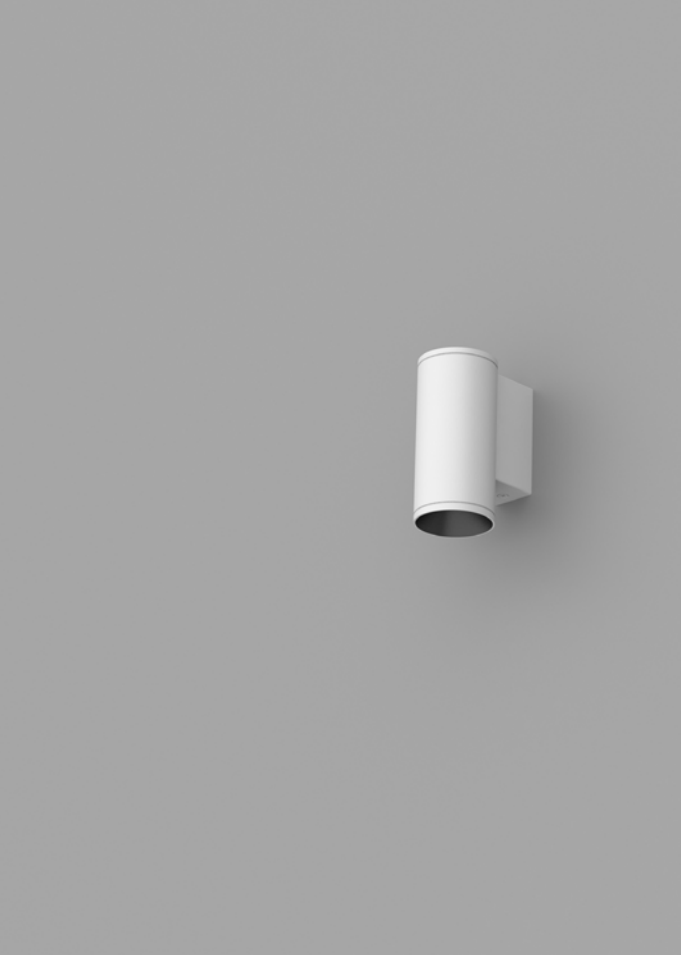

DIMENSIONS


DIAMETER	WIDTH	HEIGHT	LENGTH	CUTOUT
Ø42mm	N/A	90mm	N/A	N/A

TECHNICAL DATA

Lamp Wattage and Delivered Lumens ⁽¹⁾ :	2W : 184lm 5W : 343lm	5W Warm-Dim: 294lm	
Lamp type:	Citizen	Glow wire resistance:	850°
Lamp life:	50,000hrs L70	LED maintenance:	Integrated
Binning:	2-Step MacAdams	Connector block:	Flex and Plug
CRI:	90Ra	Mounting surface classification:	
Control gear:	Remote		
Thermal control rating:	IC-4/IC-F (abuttet & covered)	Protection classification:	
Materials:	Cast aluminium, Matt Powder Coated	Standards:	EN/AS/NZS 60598-2-2, 62031, 62471
Supply Voltage:	See page 164	Warranty:	5 years (T&Cs apply)

⁽¹⁾ Delivered lumens are based on medium beam angle and 3000K LED with honeycomb louvre attachment.

POWERED BY
IBL





SPECIFICATION

RANGE	STYLE	SIZE	MOUNTING	TYPE	BEAM ANGLE		COLOUR	CCT	DRIVER	ENGINE/POWER	ACCESSORY
Accent	Tube Surface (TSF)	Micro (MC)	Wall	Down	15°(L15) 25°(L25) 40°(L40)		White (1) Black (2)	2700K (2) 3000K (3) 4000K (4) Warm Dim 2700K-1800K (2718)	Non-Dim (1) Phase (2) 0-10V (3) DALI (4)	2W (A2) 5W (A5) 5W Warm-Dim (A5W)	Honeycomb Louvre (-H) Solite Lens (-SO)

ORDER CODE: (Bold above denotes code)

A	TSF	MC	W	D	—	.	—	—	—	—	—
---	-----	----	---	---	---	---	---	---	---	---	---

TUBE WALL UP/DOWN LARGE

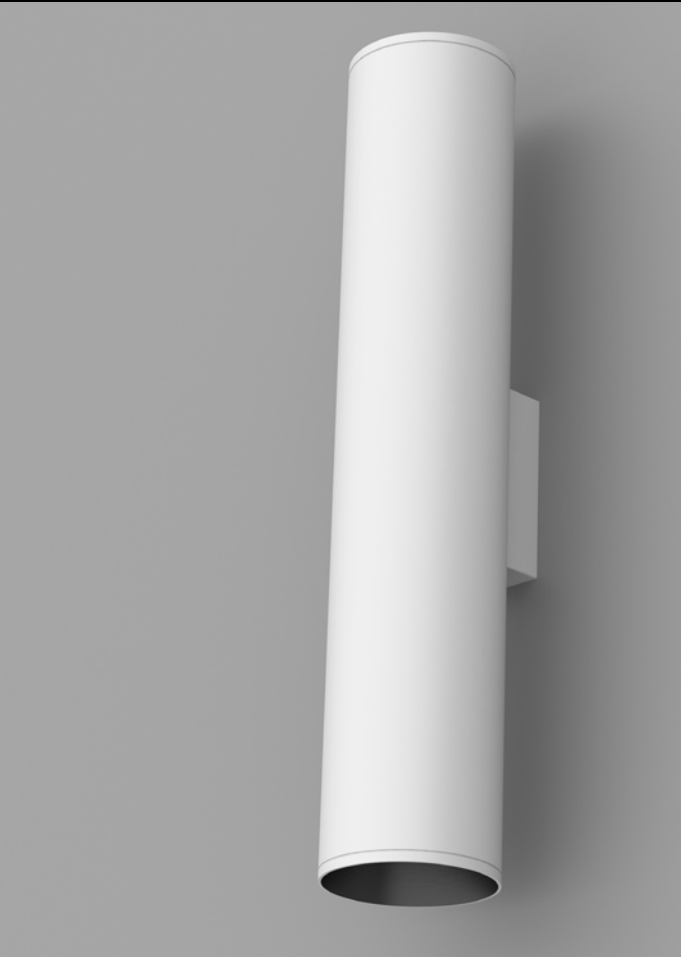

DIMENSIONS


DIAMETER	WIDTH	HEIGHT	LENGTH	CUTOUT
Ø90mm	N/A	450mm	N/A	N/A

TECHNICAL DATA

Lamp Wattage and Delivered Lumens ⁽¹⁾ : Specifications per LED	19W : 1314lm 25W : 1540lm	19W Warm-Dim: 896lm 25W Warm-Dim: 1210lm	
Lamp type:	Citizen	Glow wire resistance:	850°
Lamp life:	50,000hrs L70	LED maintenance:	Integrated
Binning:	2-Step MacAdams	Connector block:	Flex and Plug
CRI:	90Ra	Mounting surface classification:	
Control gear:	Integral		
Thermal control rating:	IC-4/IC-F (abuttled & covered)	Protection classification:	
Materials:	Cast aluminium, Matt Powder Coated	Standards:	EN/AS/NZS 60598-2-2, 62031, 62471
Supply Voltage:	See page 164	Warranty:	5 years (T&Cs apply)

⁽¹⁾ Delivered lumens are based on medium beam angle and 3000K LED with honeycomb louvre attachment

POWERED BY
IBL

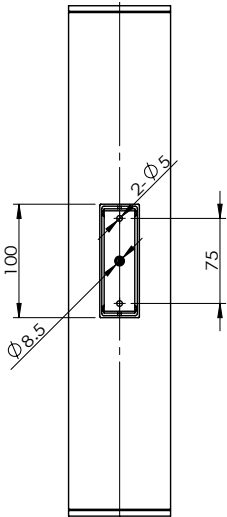


SPECIFICATION

RANGE	STYLE	SIZE	MOUNTING	TYPE	BEAM ANGLE		COLOUR	CCT	DRIVER	ENGINE/POWER	ACCESSORY
Accent	Tube Surface (TSF)	Large	Wall	Up/Down (UD)	15°(L15) 25°(L25) 35°(L35) 60°(L60)		White (1) Black (2)	2700K (2) 3000K (3) 4000K (4) Warm Dim 2700K-1800K (2718)	Non-Dim (1) Phase (2) 0-10V (3) DALI (4)	2 x 19W (D19) 2 x 25W (D23) Warm-Dim (D19W, D25W)	Honeycomb Louvre (-H) Solite Lens (-SO)

ORDER CODE: (Bold above denotes code)

A	TSF	L	W	UD	—	.	—	—	—	—	—
---	-----	---	---	----	---	---	---	---	---	---	---

TUBE WALL UP/DOWN SMALL



DIMENSIONS


DIAMETER	WIDTH	HEIGHT	LENGTH	CUTOUT
Ø60mm	N/A	280mm	N/A	N/A

TECHNICAL DATA

Lamp Wattage and Delivered Lumens ⁽¹⁾ Specifications per LED	6W : 422lm 9W : 652lm 12W : 871lm	6W Warm-Dim: 277lm 9W Warm-Dim: 418lm 12W Warm-Dim: 534lm		
	Lamp type:	Citizen	Glow wire resistance:	850°
	Lamp life:	50,000hrs L70	LED maintenance:	Integrated
Binning:	2-Step MacAdams	Connector block:	Flex and Plug	
CRI:	90Ra	Mounting surface classification:		
Control gear:	Integral			
Thermal control rating:	IC-4/IC-F (abutted & covered)	Protection classification:		
Materials:	Cast aluminium, Matt Powder Coated	Standards:	EN/AS/NZS 60598-2-2, 62031, 62471	
Supply Voltage:	See page 164	Warranty:	5 years (T&Cs apply)	

⁽¹⁾ Delivered lumens are based on medium beam angle and 3000K LED with honeycomb louvre attachment

POWERED BY
IBL

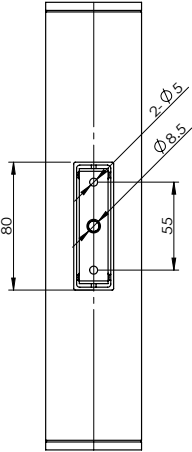



SPECIFICATION

RANGE	STYLE	SIZE	MOUNTING	TYPE	BEAM ANGLE		COLOUR	CCT	DRIVER	ENGINE/POWER	ACCESSORY
Accent	Tube Surface (TSF)	Small	Wall	Up/Down (UD)	10°(L10) 20°(L20) 35°(L35) 45°(L45) 60°(L60)		White (1) Black (2)	2700K (2) 3000K (3) 4000K (4) Warm Dim 2700K-1800K (2718)	Non-Dim (1) Phase (2) 0-10V (3) DALI (4)	6W (BF6) 9W (B9) 12W (C12) Warm-Dim (B6W, B9W, C12W)	Honeycomb Louvre (-H) Solite Lens (-SO)

ORDER CODE: (Bold above denotes code)

A	TSF	S	W	UD	—	.	—	—	—	—	—
---	-----	---	---	----	---	---	---	---	---	---	---

TUBE WALL UP/DOWN MINI

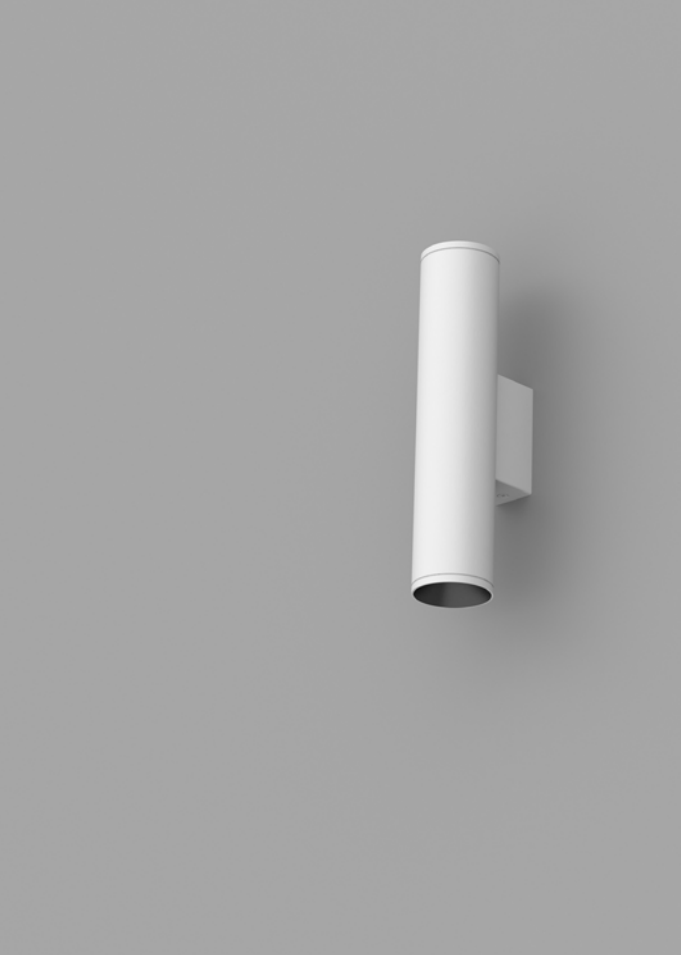

DIMENSIONS


DIAMETER	WIDTH	HEIGHT	LENGTH	CUTOUT
Ø42mm	N/A	190mm	N/A	N/A

TECHNICAL DATA

Lamp Wattage and Delivered Lumens ⁽¹⁾ : Specifications per LED		2W : 184lm 5W : 343lm		5W Warm-Dim: 294lm	
Lamp type:	Citizen		Glow wire resistance:	850°	
Lamp life:	50,000hrs L70		LED maintenance:	Integrated	
Binning:	2-Step MacAdams		Connector block:	Flex and Plug	
CRI:	90Ra		Mounting surface classification:		
Control gear:	Non-Dim, Phase : Integral, 0-10V, DALI, Remote				
Thermal control rating:	IC-4/IC-F (abutted & covered)		Protection classification:		
Materials:	Cast aluminium, Matt Powder Coated		Standards:	EN/AS/NZS 60598-2-2, 62031, 62471	
Supply Voltage:	See page 164		Warranty:	5 years (T&Cs apply)	

(1) Delivered lumens are based on medium beam angle and 3000K LED with honeycomb louvre attachment

POWERED BY
IBL

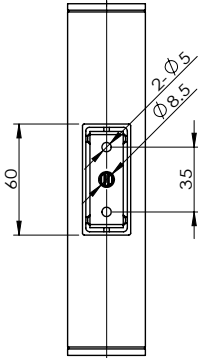

SPECIFICATION

RANGE	STYLE	SIZE	MOUNTING	TYPE	BEAM ANGLE		COLOUR	CCT	DRIVER	ENGINE/POWER	ACCESSORY
Accent	Tube Surface (TSF)	Mini (MI)	Wall	Up/Down (UD)	15°(L15) 25°(L25) 40°(L40)		White (1) Black (2)	2700K (2) 3000K (3) 4000K (4) Warm Dim 2700K-1800K (2718)	Non-Dim (1) Phase (2) 0-10V (3) DALI (4)	2 x 2W (A2) 2 x 5W (A5) 5W Warm-Dim (A5W)	Honeycomb Louvre (-H) Solite Lens (-SO)

ORDER CODE: (Bold above denotes code)

A	TSF	MI	W	UD	—	.	—	—	—	—	—
---	-----	----	---	----	---	---	---	---	---	---	---

ENGINES



ENGINES



ENGINE	LED POWER	DRIVER REQUIREMENTS	COLOUR TEMPERATURE	BEAM ANGLES	LUMINOUS FLUX (LM) @3000K
A ENGINE 	2W	9V / 250mA	2700K, 3000K, 4000K	15°	280
				25°	277
				40°	279
	5W	9V / 500mA	2700K, 3000K, 4000K	15°	511
				25°	515
				40°	513
		36V / 150mA	Warm-Dim 2700K-1800K	25°	442
				40°	377

ENGINE	LED POWER	DRIVER REQUIREMENTS	COLOUR TEMPERATURE	BEAM ANGLES	LUMINOUS FLUX (LM) @3000K
PUK 	2W	9V / 250mA	2700K, 3000K, 4000K	10°	216
				20°	212
				30°	192
	5W	9V / 500mA	2700K, 3000K, 4000K	10°	409
				20°	382
				30°	350
		36V / 150mA	Warm Dim 2700K - 1800K	15°	350
				20°	349
				35°	316

ENGINE	LED POWER	DRIVER REQUIREMENTS	COLOUR TEMPERATURE	BEAM ANGLES	LUMINOUS FLUX (LM) @3000K
6W B ENGINE 	6W	9V / 700mA	2700K, 3000K, 4000K	10°	626
				20°	621
				35°	601
				45°	570
				60°	598
		36V / 160mA	Warm Dim 2700K - 1800K	20°	409
				35°	394
				45°	393
				60°	413

ENGINE	LED POWER	DRIVER REQUIREMENTS	COLOUR TEMPERATURE	BEAM ANGLES	LUMINOUS FLUX (LM) @ 3000K
9W B ENGINE 	9W	31V / 250mA	2700K, 3000K, 4000K	10°	791
		36V / 250mA		20°	957
				35°	929
				45°	874
				60°	911
		36V / 250mA	Warm-Dim 2700K-1800K	20°	621
				35°	596
				45°	594
				60°	628

ENGINE	LED POWER	DRIVER REQUIREMENTS	COLOUR TEMPERATURE	BEAM ANGLES	LUMINOUS FLUX (LM) @3000K
C ENGINE 	12W	31V / 350mA	2700K, 3000K, 4000K	10°	1015
		36V / 350mA		20°	1297
				35°	1242
				45°	1171
				60°	1224
		36V / 350mA	Warm-Dim 2700K-1800K	20°	787
				35°	761
				45°	776
				60°	805

ENGINE	LED POWER	DRIVER REQUIREMENTS	COLOUR TEMPERATURE	BEAM ANGLES	LUMINOUS FLUX (LM) @3000K
D ENGINE 	19W	36V / 550mA	2700K, 3000K, 4000K	10°	1960
				20°	2272
				35°	2214
				45°	2190
				60°	1996
		36V / 550mA	Warm-Dim 3000K-2000K	20°	1555
				35°	1509
				45°	1481
	25W	36V / 700mA	2700K, 3000K, 4000K	60°	1311
				10°	2369
				20°	2797
				35°	2709
				45°	2691
				60°	2456
		36V / 700mA	Warm-Dim 3000K-2000K	20°	2093
				35°	2038
				45°	1996
				60°	1766

lightkit@ibl.co.uk

www.lightkit.co

